


## Corotherm®


Polycarbonate Insulated Roofing Sheet

### 10mm Twinwall

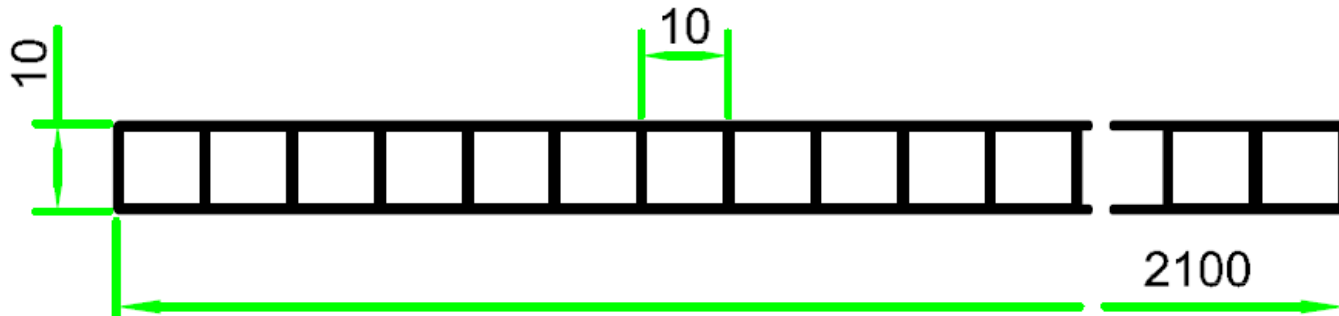

Span/Load Table			
Load (kN/m <sup>2</sup> )	Sheet Width		
	700m m	980m m	1250m m
<b>0.6</b>		<b>2.19</b>	<b>1.56</b>
<b>0.7</b>	<b>6.00</b>	<b>1.97</b>	<b>1.44</b>
<b>0.8</b>	<b>4.16</b>	<b>1.80</b>	<b>1.35</b>
<b>0.9</b>	<b>3.48</b>	<b>1.67</b>	<b>1.27</b>
<b>1.0</b>	<b>3.08</b>	<b>1.57</b>	<b>1.21</b>

Safe span figures are based on 20mm edge engagement plus a safety factor of 1.2

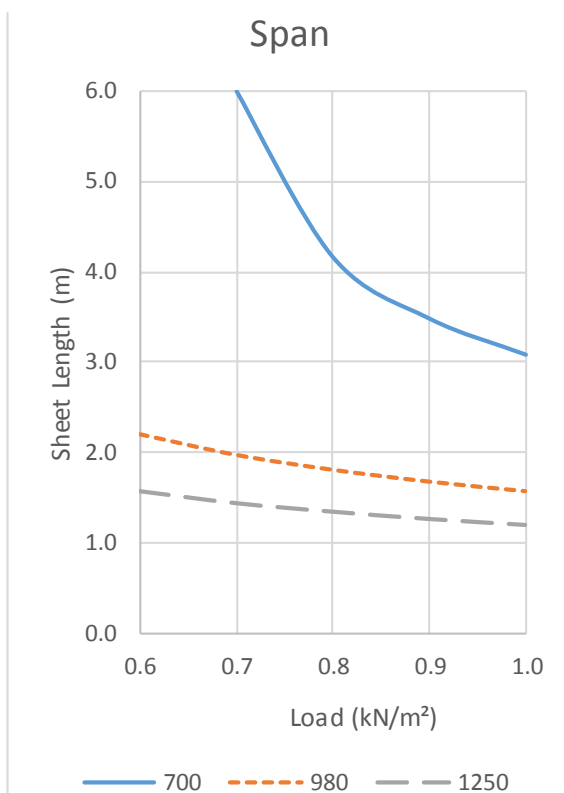

Colour	Transmission	
	Light	Solar
Clear	82%	80%
Bronze	33%	55%
Opal	40%	47%

Product Characteristics	
<b>Width</b>	≤1250mm +/- 4mm
<b>Length</b>	≤2100mm -0, +8mm 6m -0, +10mm Over 6m -0, +25mm
<b>Thickness</b>	10mm +/-0.5mm
<b>Sheet Weight</b>	1.7Kg/m <sup>2</sup>
<b>U Value</b>	3.2W/m <sup>2</sup> K
<b>Min Curve Radius</b>	1500mm



This information is given in good faith & is believed by Brett Martin Ltd to be accurate & reliable. Since the use of this information is not within Brett Martins control, no warranty, expressed or implied is given. It is the users' responsibility to determine whether the product is appropriate for their purpose.

Brett Martin Ltd. pursues a policy of continuous product development and reserves the right to amend specification without notice.

Brett Martin Ltd., 24 Roughfort Road, Mallusk, Co. Antrim, N.Ireland, BT36 4RB.

Tel: +44 (0)28 9084 9999 Fax: +44 (0)28 9083 6666 E-mail: [technical@brettmartin.com](mailto:technical@brettmartin.com)

REF CODE Corotherm\_010\_0\_2W\_17



**Corotherm** is the multiwall polycarbonate sheet manufactured by Brett Martin. The sheet is characterised by high optical clarity, light transmission, impact resistance and durability. It is available in a range of standard sizes, clear and tinted. Corotherm Longlife has a coextruded UV protection layer on one side.

#### **Warranty**

There is 10 year limited warranty against loss of light transmission, yellowing and weather impact available for this product.

#### **Quality**

Manufactured under ISO 9001: 2008 to EN 16153:2013

#### **Handling & Safety**

Do not step directly on the rooflight. Use stepping boards. Work according to local safety regulations

#### **Storage**

Store in a shaded place, protect from direct sunlight and rain prior to installation. Avoid covering the sheets with heat absorbing materials. Avoid contact with chemicals. Protect the sheets from physical damage.

#### **Installation**

Make adequate allowance for thermal movement, nominally 3.5mm per metre. Holes drilled for fixings must be oversized. Sheet lengths must be limited to ensure there is no excessive movement at the end laps.

#### **Service Temperature**

For stable prolonged service ranging from  $-20^{\circ}\text{C}$  to  $100^{\circ}\text{C}$ . (Short term unstressed  $-40^{\circ}\text{C}$  to  $130^{\circ}\text{C}$ )

#### **Maintenance**

In order to maintain this product in good condition it should be cleaned periodically using suitable detergent cleaning agents. Do not use solvent cleaners. Do not scrub with brushes or sharp implements. Avoid cleaning in hot sun or high temperatures.



This information is given in good faith & is believed by Brett Martin Ltd to be accurate & reliable. Since the use of this information is not within Brett Martins control, no warranty, expressed or implied is given. It is the users' responsibility to determine whether the product is appropriate for their purpose.

Brett Martin Ltd. pursues a policy of continuous product development and reserves the right to amend specification without notice.

Brett Martin Ltd., 24 Roughfort Road, Mallusk, Co. Antrim, N.Ireland, BT36 4RB.

Tel: +44 (0)28 9084 9999 Fax: +44 (0)28 9083 6666 E-mail: [technical@brettmartin.com](mailto:technical@brettmartin.com)

REF CODE Corotherm\_010\_0\_2W\_17