



CD-901AH-KMD - Ductile Iron Kitemark Manhole Cover & Frame


KEY FEATURES

- BSI Kitemark certified to BS EN124 2015
- Non-rock 3-point suspension covers with ultra-high tread density for long service life
- Integral Lifting key Holes
- Heavy duty design to cope with the demands of heavily-trafficked areas
- Vented corner grouting pockets on frame flange to improve bond to bedding mortar in highly stressed areas for durability in service
- Compliant to the design requirements of Highways Agency DMRB CD 534 (low or high risk areas)
- Enlarged frame corners and extra-wide flange for improved distribution of loading in key areas



CD-901AH-KMD - Specifications

Product Weight (Kg)	115
Cover Weight (Kg)	68
Clear Opening	600 x 600
Overall Dimensions	851 x 851
Depth	150
Material	Spheroid Graphite Iron Grade EN-GJS-500-7 to BS EN 1563:2011 Temporary Bitumen based paint coating to BS 3416:1991
Load Rating	D400
Polished Skid Resistance Value	60
Frame Pressure Bearing Area (N/mm ²)	1.73
Application	For use in heavily trafficked carriageways and commercial/industrial areas

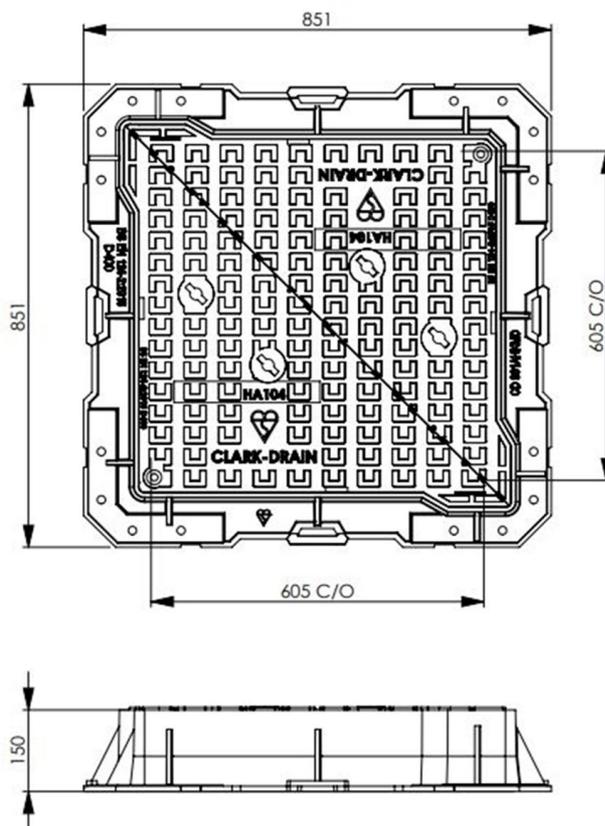

CD901AHKMD/V0.1/13-09-2023

Due to our continuous product improvement program features and sizes may be subject to change without notice.

CLARK DRAIN, STATION ROAD, YAXLEY, PETERBOROUGH, PE7 3EQ, TEL. +44 (0) 1733 765317