

PRODUCT DESCRIPTION

The Circoflo localised high quality 3/4" 2,3 or 4-port manifolds include temperature gauges, lockshield valves, a manual air vent, balancing valves and come with 230V actuators.

TECHNICAL DETAILS


Sizes available: 2 to 4 Port

Suitable for: Water, Water/Glycol mixtures

Temperature Range: -10°C to +95°C

Max system pressure: 6 bar

Actuators: 230 Volt

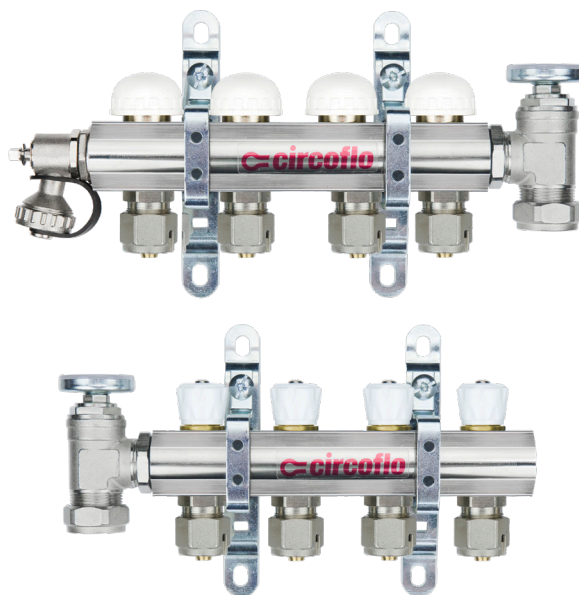

CONNECTION

The Circoflo manifold can be used with towel rails or radiators. If high temperature water is needed for the radiators then the Circoflo manifold (if used for radiators only) should be connected to the boiler primary before a water mixing unit and the pipe used should be suitable for high temperature circuits – DO NOT USE CIRCOFLO UNDERFLOOR HEATING PIPE. 15mm copper pipe connectors for Circoflo manifolds and fittings are available.

DIMENSIONS

Note: When installing the manifold, allow an additional 100mm to each dimension for working space.

Dimension (mm)	Manifold ports		
	2	3	4
L (mm)	305	355	405
H (mm)	365	365	365
D (mm)	90	90	90