STORA DRAIN
SELF RANGE
DRAINAGE SOLUTION

Class:
A15 & B125

EN1433:2002

DESIGN FEATURES:

- Material(s):
- SG Iron 500/7 to ISO 1083/EN1563
- Polymer resin concrete

- Design Load:
- 15 kN to EN1433:2002, Group 1
- 125 kN to EN1433:2002, Group 2

- Installation Area:
For **A15**:
- Areas subjected to pedestrian traffic e. g. sidewalks, driveways, gardens.

For **B125**:
- Areas subjected to light to moderate vehicular traffic, e. g. some car parks, residential area,driveways.

- Coating:
- Non toxic, water based paint.


SPECIAL FEATURES:

- Locked as standard:
Locked with:
1 No. M8X55 Hex Bolt for 500mm long channels;
2 No. M8X55 Hex Bolt for 1000mm long channels.


- Compliance to:
- EN1433:2002

- Grating options:


A15
- Galvanized grating slot 10mm




B125
- Galvanized mesh grating 30x10





B125
- Ductile iron grating "S"

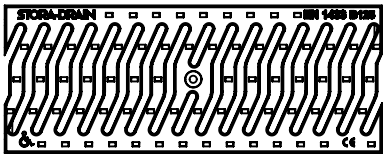


B125
- Ductile iron grating "WAVE"




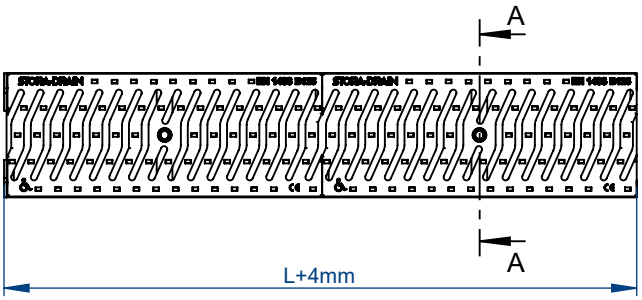




SECTION A-A

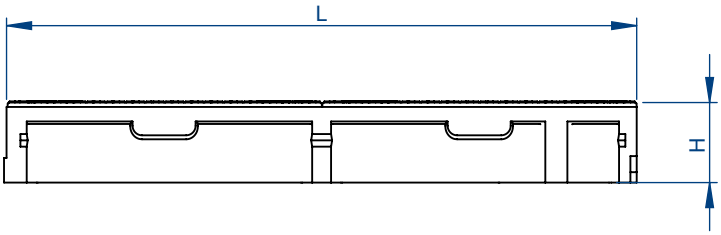

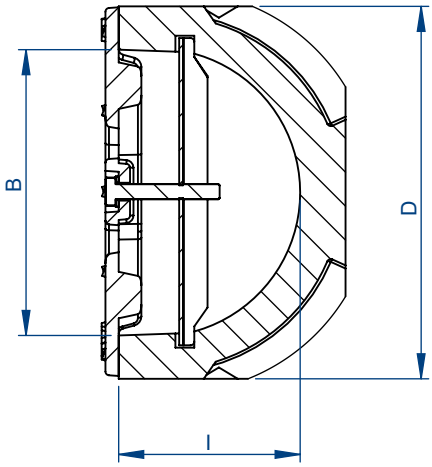

DETAIL B

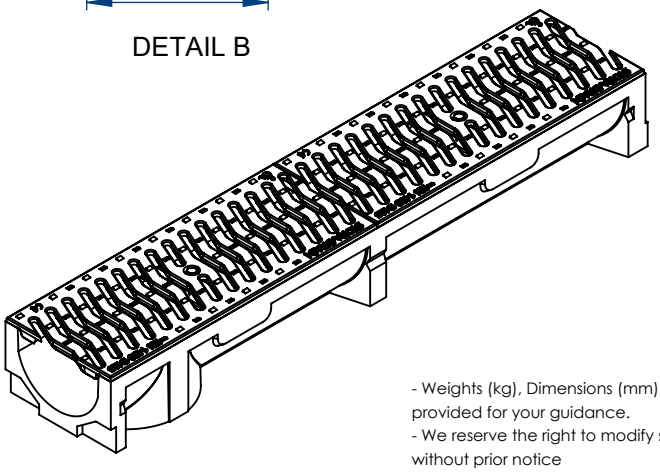

- Weights (kg), Dimensions (mm) & Drawings provided for your guidance.
- We reserve the right to modify specifications without prior notice
- Due to casting tolerances dimensions may vary
- Uncontrolled distribution

Property of EJ EMEA

Not to be used without permission

Patent Protected

EJ
Liberty House: Liberty Business Park: Attleborough
Nuneaton: Warwickshire: CV11 6RZ:
www.ejco.com
Quality System ISO 9001

Data Sheet:
Self Range
Revision: Initial Draft
Date Updated: 27/02/2025

STORA DRAIN

SELF RANGE

DRAINAGE SOLUTION

Class:
A15 & B125

EN1433:2002

	Product Code	Height (mm) "H"	Width (mm) "D"	Channel Opening Width (mm) "B"	Invert Depth (mm) "I"	A15 Galvanized Grating Slot 10mm	B125 Galvanized Mesh Grating 30x10	B125 Ductile Iron Grating "S"	B125 Ductile Iron Grating "WAVE"	Weight (Kg)
SELF 100 L=1000mm Vertical Outlet = ∅110	SE10061100N	60	120	100	50	✓	X	X	X	6.2
	SE10061204N	60	120	100	50	X	✓	X	X	8.2
	SE10061367	60	120	100	50	X	X	✓	X	9.7
	SE10061373	60	120	100	50	X	X	X	✓	9.7
	SE10081100N	80	120	100	68	✓	X	X	X	6.7
	SE10081204N	80	120	100	68	X	✓	X	X	8.7
	SE10081367	80	120	100	68	X	X	✓	X	10.2
	SE10081373	80	120	100	68	X	X	X	✓	10.2
	SE10081100PN	80	120	100	68	✓	X	X	X	6.7
	SE10081204PN	80	120	100	68	X	✓	X	X	8.7
	SE10081367P	80	120	100	68	X	X	✓	X	10.2
	SE10081373P	80	120	100	68	X	X	X	✓	10.2
	SE10101100SN	100	120	100	85	✓	X	X	X	7.9
	SE10101204SN	100	120	100	85	X	✓	X	X	9.9
	SE10101367S	100	120	100	85	X	X	✓	X	11.1
	SE10101373S	100	120	100	85	X	X	X	✓	11.1
	SE10101100PN	100	120	100	85	✓	X	X	X	7.9
	SE10101204PN	100	120	100	85	X	✓	X	X	9.9
	SE10101367P	100	120	100	85	X	X	✓	X	11.1
	SE10101373P	100	120	100	85	X	X	X	✓	11.1
	SE10121100N	120	120	100	105	✓	X	X	X	9.4
	SE10121204N	120	120	100	105	X	✓	X	X	11.1
	SE10121367	120	120	100	105	X	X	✓	X	13.5
	SE10121373	120	120	100	105	X	X	X	✓	13.5
	SE10161100N	160	120	100	145	✓	X	X	X	10.5
	SE10161204N	160	120	100	145	X	✓	X	X	12.2
	SE10161367N	160	120	100	145	X	X	✓	X	13.5
	SE10161373	160	120	100	145	X	X	X	✓	13.5
SELF 150 L=1000mm Vertical Outlet = ∅160	SE15121110	120	195	150	96	✓	X	X	X	16.2
	SE15121327	120	195	150	96	X	X	✓	X	24.8
	SE15121206	120	195	150	96	X	✓	X	X	20
	SE15191110N	190	195	150	170	✓	X	X	X	21.8
	SE15191327N	190	195	150	170	X	X	✓	X	27
	SE15191206N	190	195	150	170	X	✓	X	X	25.6
SELF 200 L=1000mm Vertical Outlet = ∅200	SE20131326	130	245	200	108	X	X	✓	X	30.2
	SE20241326N	240	245	200	220	X	X	✓	X	35.7

Property of EJ EMEA

Not to be used without permission

Patent Protected

EJ

Liberty House: Liberty Business Park: Attleborough
Nuneaton: Warwickshire: CV11 6RZ:
www.ejco.com

Quality System ISO9001

Data Sheet:
Self Range
Revision: Initial Draft
Date Updated: 27/02/2025