


Gemini®

MINISLATE®

V2®

SL8®

PAN8®

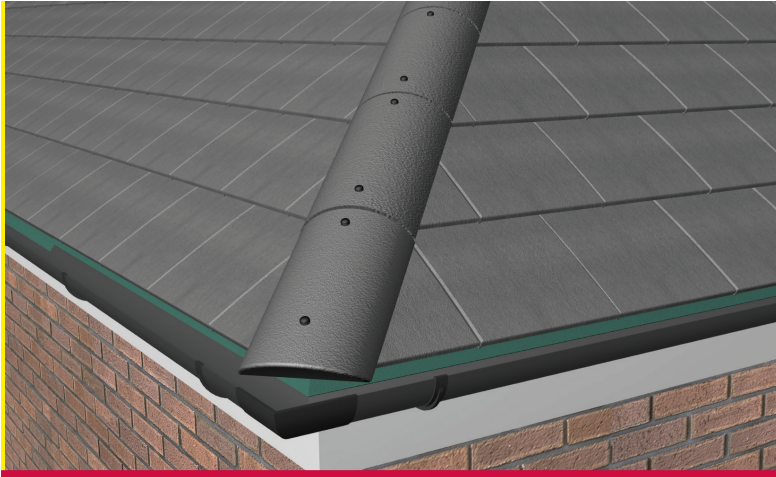


Hip Detailing

Mechanically Fixed Hip (6 linear metres)


Installation Guide - Instruction Notes 1-7

- 1) Construct the hip rafter to a height of 50mm. The hip rafter height is nominal and is measured from the underside of the tiling batten to the top of the hip rafter, based on a 25mm batten (Picture 1).




Picture 1

- 2) Fix lengths of batten to the side of the hip rafter to support the ends of tiling battens running into the hip. Install underlay and tiling battens in accordance with BS 5534 (Picture 2).



Picture 2

- 3) Cut tiles into the hip rafter. Tile clips must be fitted where possible. Unsupported slips of tile should be bonded to the adjacent, twice mechanically fixed tile using a suitable bonding adhesive (Picture 3).



Picture 3


- 4) Tiles at the bottom of the hip should be cut as shown to allow the block end hip tile to sit as close to the fascia as possible (Picture 4).



Picture 4


- 5) At the bottom of the hip, lay the first carrier tray.

- 6) Position a block end hip tile and fix to the hip timber using 2 x 80mm drive screws with washers and grommets. Continue laying carrier trays and hip tiles in the same manner (Picture 5).



Picture 5

- 7) At the ridge/hip junction position a code 4 lead saddle over the last course of tiles to weather proof the ridge/hip union (Picture 6). Neatly mitre cut the third round hip and ridge tiles to form a neat weathertight junction. All ridge and hip tiles must be twice mechanically fixed. Re-drilling nail holes may be necessary to provide adequate fixings.

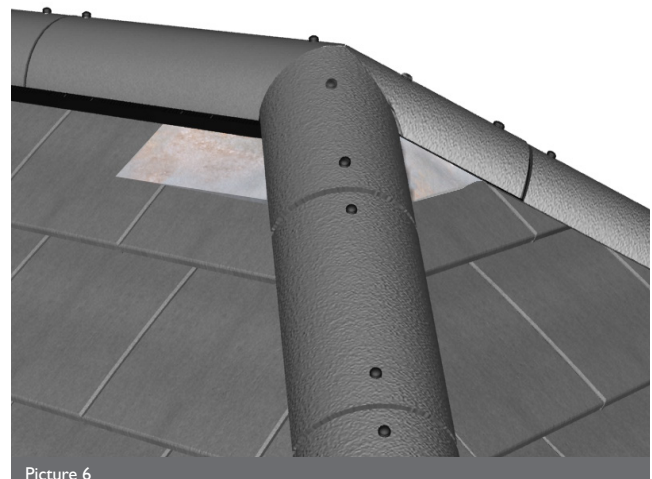

Picture 6

Forticrete

an IBSTOCK plc company

January 2018

Gemini®

MINISLATE®

V2®

SL8®

PAN8®

Mechanically Fixed Hip Pack Components (6 linear meters)



Flat Tile Mechanically Fixed Hip Pack

- A) 14 x Hip Carrier Trays with 25mm Foams
- B) 28 x 80mm Drive Screws, Washers and Grommets



Profiled Tiles Mechanically Fixed Hip Pack

- A) 14 x Hip Carrier Trays with 60mm Foams
- B) 28 x 80mm Drive Screws, Washers and Grommets

Suitable Hip Tiles (Ordered Individually)

- Nailhole Third Round Hip Tiles
- Nailhole Third Round Block End Hip Tiles
- Nailhole Universal Angle Hip Tiles
- Nailhole Universal Angle Block End Hip Tiles

Roofing Systems & Technical enquiries:

Forticrete Limited,
Boss Avenue, off Grovebury Road,
Leighton Buzzard, Beds LU7 4SD
Tel: 01525 244900
Fax: 01525 850432
E-mail: roofing@forticrete.com

Information on the complete range of Forticrete products can be found on the Internet at www.forticrete.co.uk

Forticrete, Gemini, Minislate, Centurion, Senator, V2, Hardow Slates, Ecotile, Ecotile Plus and Ecoslate logo's are registered trademarks of Forticrete Ltd.

The information contained within this publication is as accurate as possible at the time of going to press. However, this document does not form part of any contract and Forticrete cannot accept liability for any errors or omissions.

In order to maintain its position as a market leader, Forticrete operates a policy of continuous product development and therefore reserves the right to alter specifications without notice.

© Forticrete Ltd. 2018



Forticrete

an IBSTOCK plc company