MICHELMERSH
Britain's Brick Specialists

# Product Technical Information Sheet


Carlton™

# Crigglestone Brown

| | | | | | |
|---|---|---|---|---|---|
| Configuration (EN 771.1): | Vertically Perforated Clay Facing Brick | | Dimensions: | 215 x 102, 5 x 65 mm | |
| Compressive Strength: | >= 40 | N/mm² | Dimensional Tolerance: | T2 | |
| Compressive Strength Category: | II | | Dimensional Range: | R1 | |
| Freeze/Thaw Resistance: | F2 | | Water Absorption: | =< 10 | % |
| Soluble Salts Content Category: | S2 | | Initial Rate of Water Absorption: | 1.5 | kg/m².min |
| Reaction to Fire: | Class A1 | | Dangerous Substances: | N/A | |
| Thermal Conductivity (P = 50): | 0.62 | W/m.K | Thermal Resistance (P = 50): | 0.17 | m².K/W |
| Thermal Conductivity (P = 90): | 0.69 | W/m.K | Thermal Resistance (P = 90): | 0.15 | m².K/W |
| Void Percentage: | 26 - 30 | % | Net Dry Density: | 2100 | kg/m³ |
| Water Vapour Permeability Coefficient: | 50/100 | | Gross Dry Density: | 1500 | kg/m³ |
| Bond Strength (fixed value): | 0.15 | N/mm² | Density Tolerance: | D1 | |
| Quantity per Pack: | 504 | | Product Weight: | 2.103 | kg |
| DoP common root reference code: | --CT65FABR-- | | Products per Square Metre: | 60 | |

Clay bricks are manufactured and supplied to relevant clauses of BS EN 771-1.

Declarations of performance, environmental and other policies can be found on the company website: **www.mbhplc.co.uk**. Further information is available via our sales department on 0844 931 0022 or email **sales@mbhplc.co.uk**.

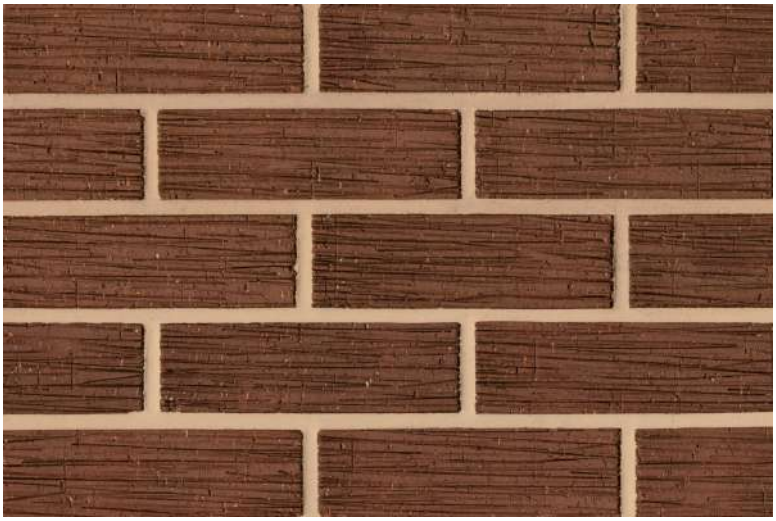

Technical data correct at the time of issue. Please order a sample for accurate representation of product.

Issue Date: 21/07/2025