
POWERLON DRY RIDGE KIT



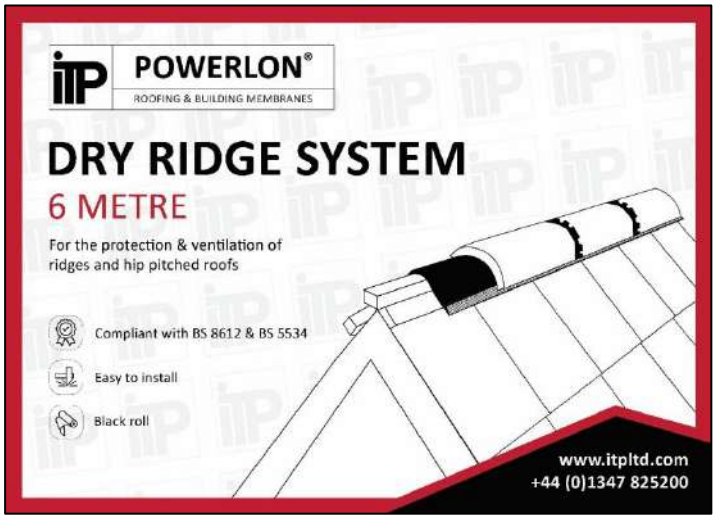

Description

ITP Powerlon Dry Ridge Kits 6m

Application

For the protection and ventilation of ridges and hip pitched roofs.

Key Features

- Sealing and ventilation of ridge roof space
- Protects against wind uplift, water ingress and general deterioration
- Provides the recommended 5mm continuous opening at the ridge
- Compatible with most models of concrete, clay, half round and angled tiles
- Easy, quick and mortar free installation
- High quality stainless steel fixings for durability and long lasting protection
- Suitable for ridge and hip tile applications
- Adjustable clip height and flexible vent roll

Box Contents

- 1 x Ridge Tape
- 10 x Batten support bracket
- 13 x Fixing Screws
- 13 x Ridge unions
- 26 x Outer clips and 13 x Large clips

Storage

The rolls should be stored in an upright position under cover, in a well-ventilated area, free from moisture. Protect from chemical detergents, high temperatures and sunlight.

Physical Properties

Ridge Tape

Material	Aluminium, polypropylene non-woven fabric, butyl
Colour (RAL)	Black 9005
Length	6m
Width	310mm
Adhesive layer width	15mm
Adhesive layer thickness	1.0mm

Batten Support Bracket

Material	Galvanised Steel
Length of shank connectors	75mm
Total Length	210mm
Sheet thickness	≥1.0mm

Ridge Unions and clips

Material	Polypropylene
Length of ridge union	320mm
Width of ridge union	50mm

Fixing screws

Material	Stainless Steel
Length of screw	100mm

© Industrial Textiles & Plastics Ltd