




Concealed Closer Single Action ITS11204







220219
1720-CPR-0188

www.rutlanduk.co.uk



Fire Doors

Use in conjunction with the
IP.114 Intumescent kit +
Fitting Instruction

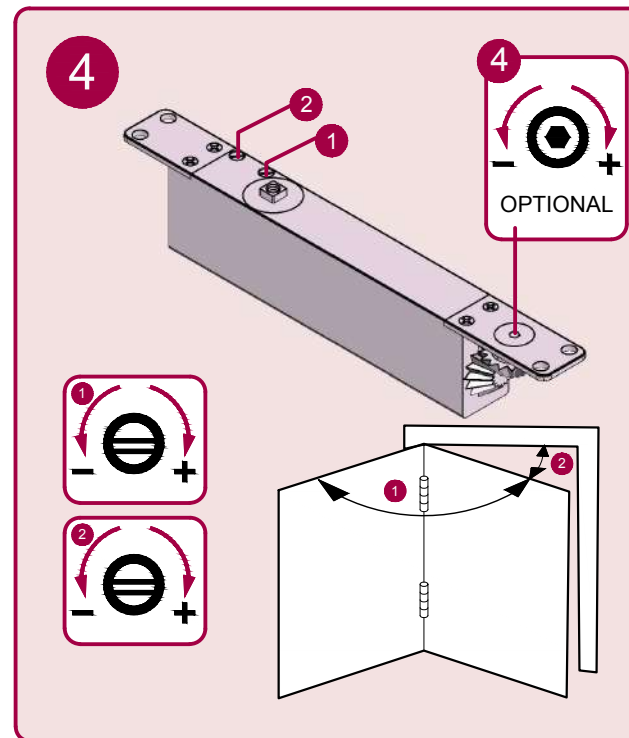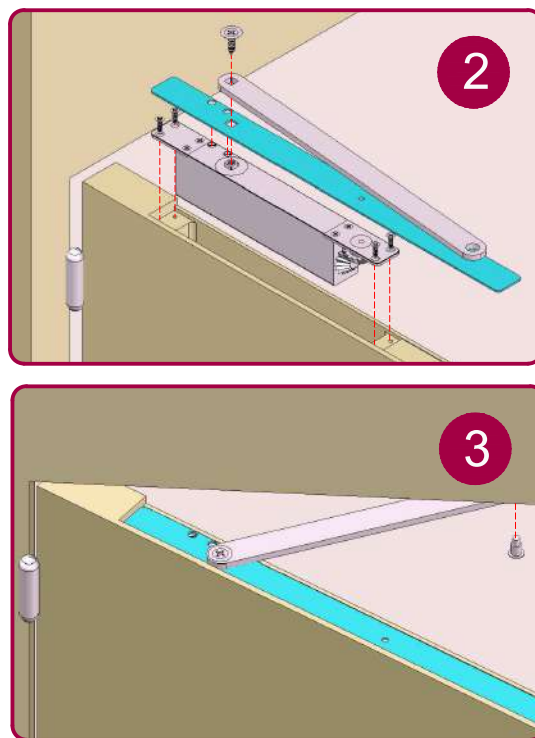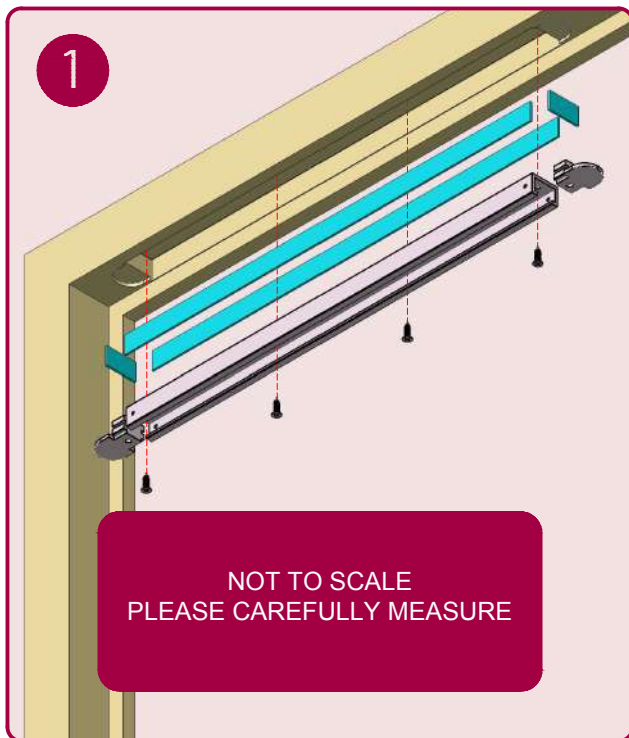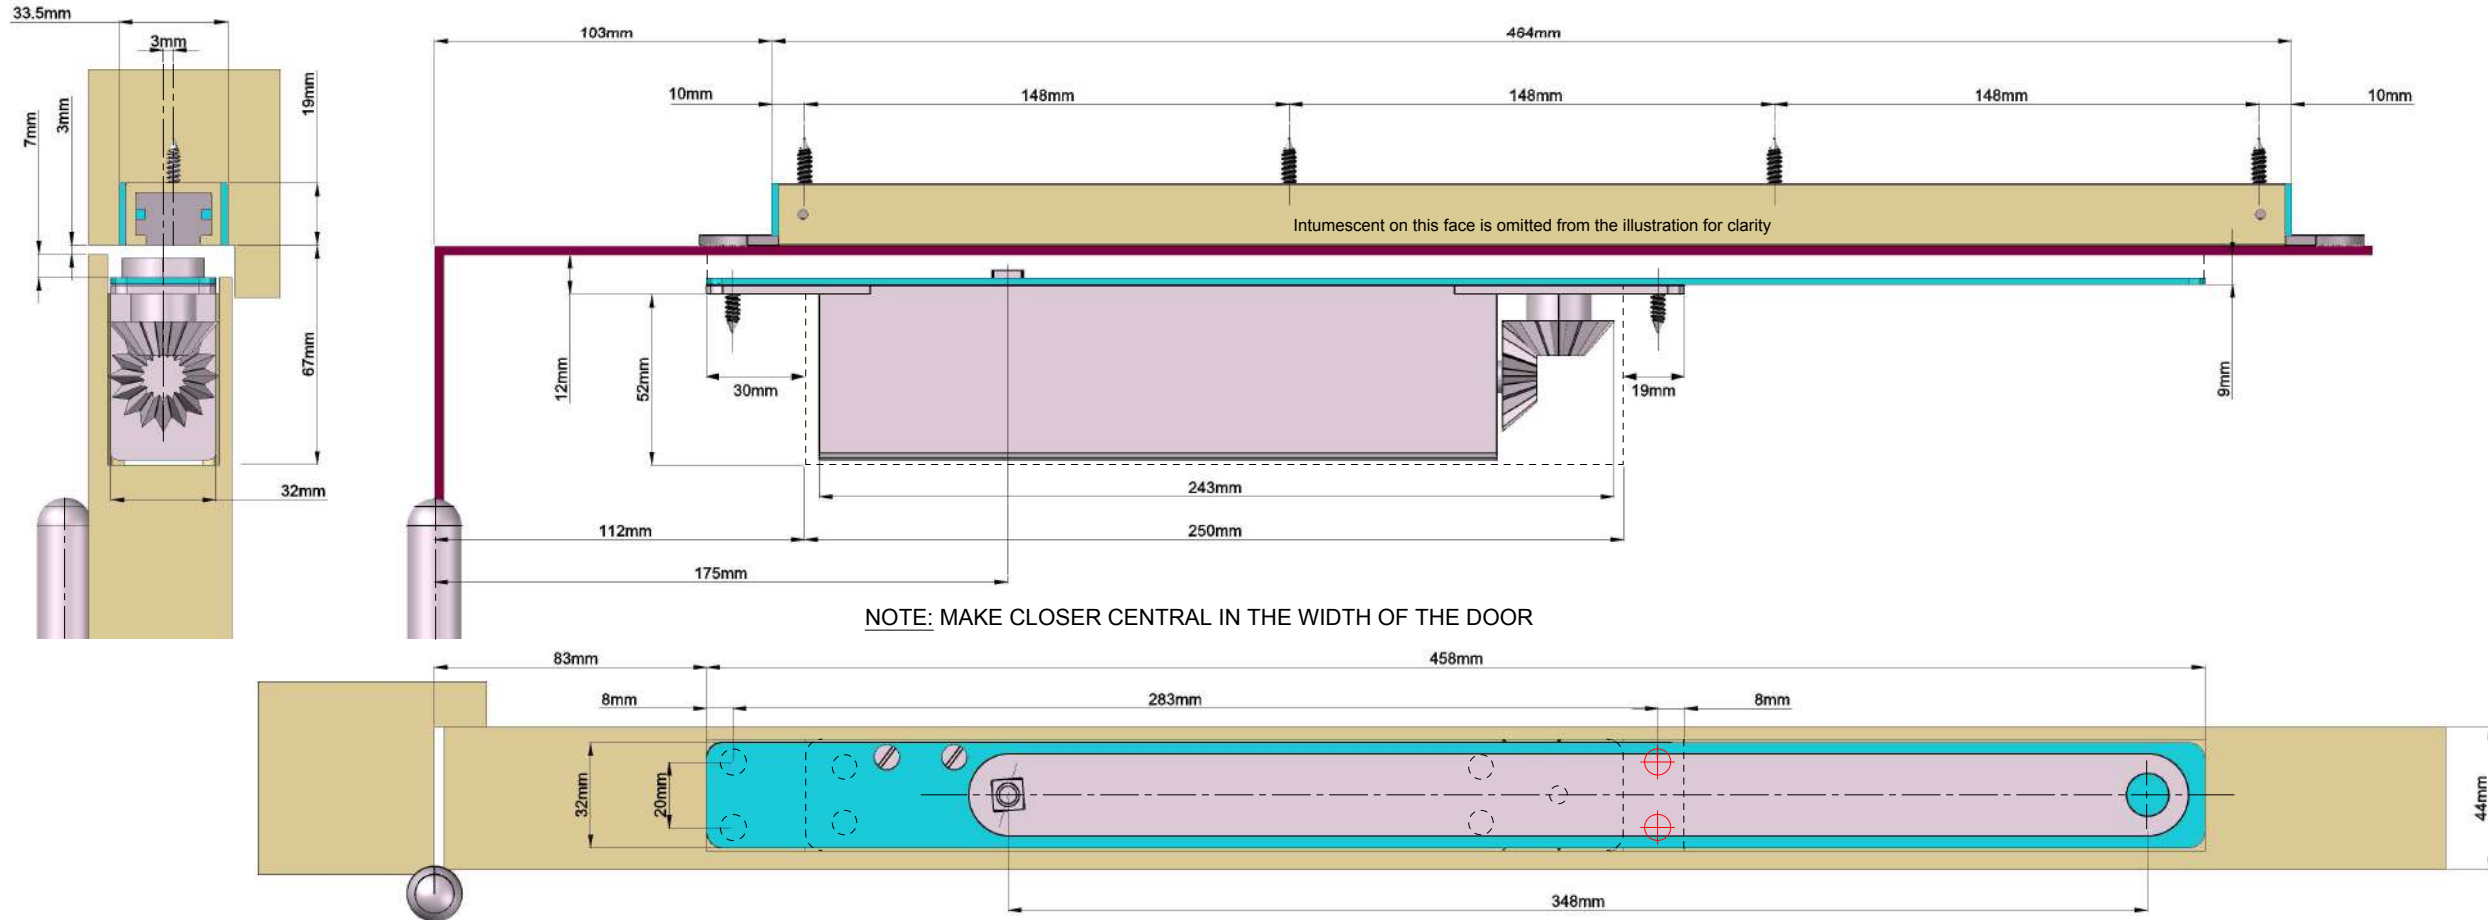

Size 2-4 Power Adjustment


No. of turns	Size	Max. door width	Max. opening angle	Max weight KG
-4	2"	850mm	110°	45
*0	3	950mm	110°	60
+6	4	1100mm	110°	80

* FACTORY PRE-SET
■ NOT SUITABLE FOR FIRE DOORS

THE PINION BOLT MUST BE TIGHTENED TO 12NM
FIRE DOORS MUST BE FITTED WITH INTUMESCENT GASKETS

Fire Doors

Use in conjunction with the IP.114 Intumescent kit + Fitting Instruction





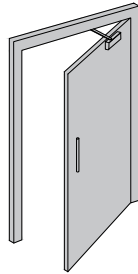


Concealed Closer Single Action ITS11204



220219
1720-CPR-0188

www.rutlanduk.co.uk

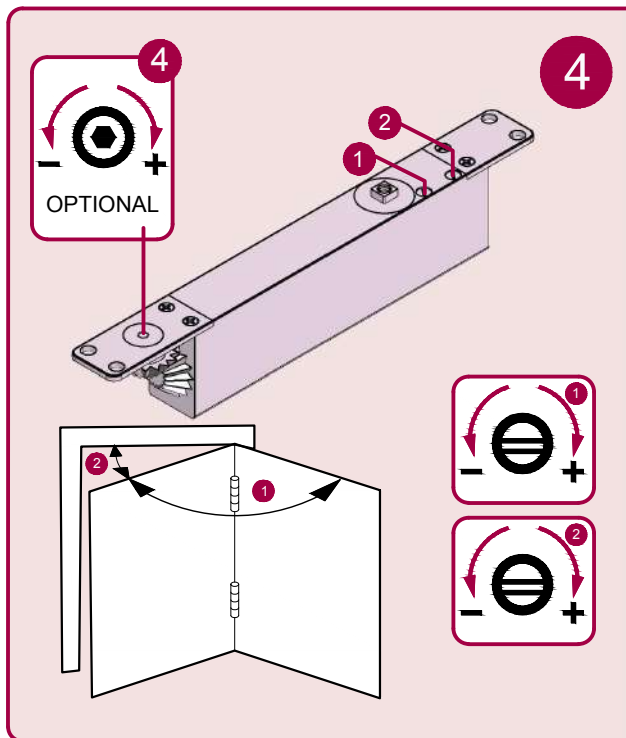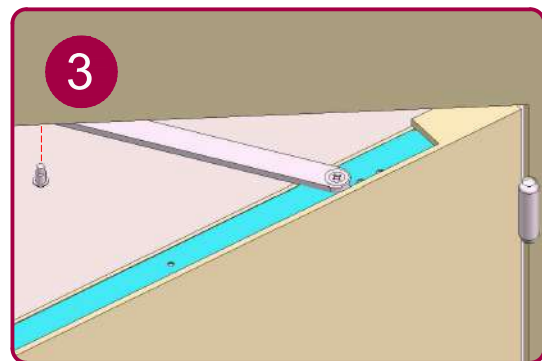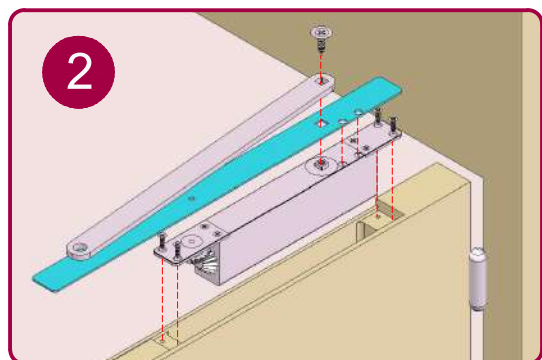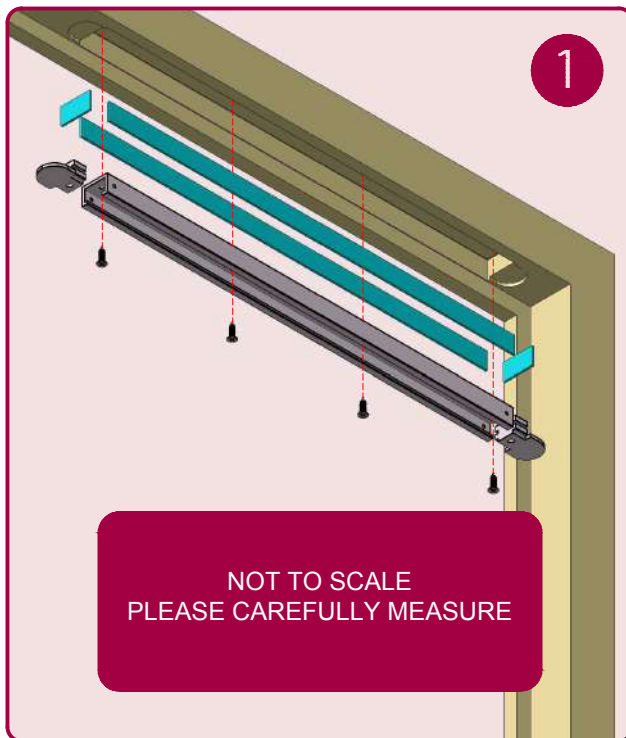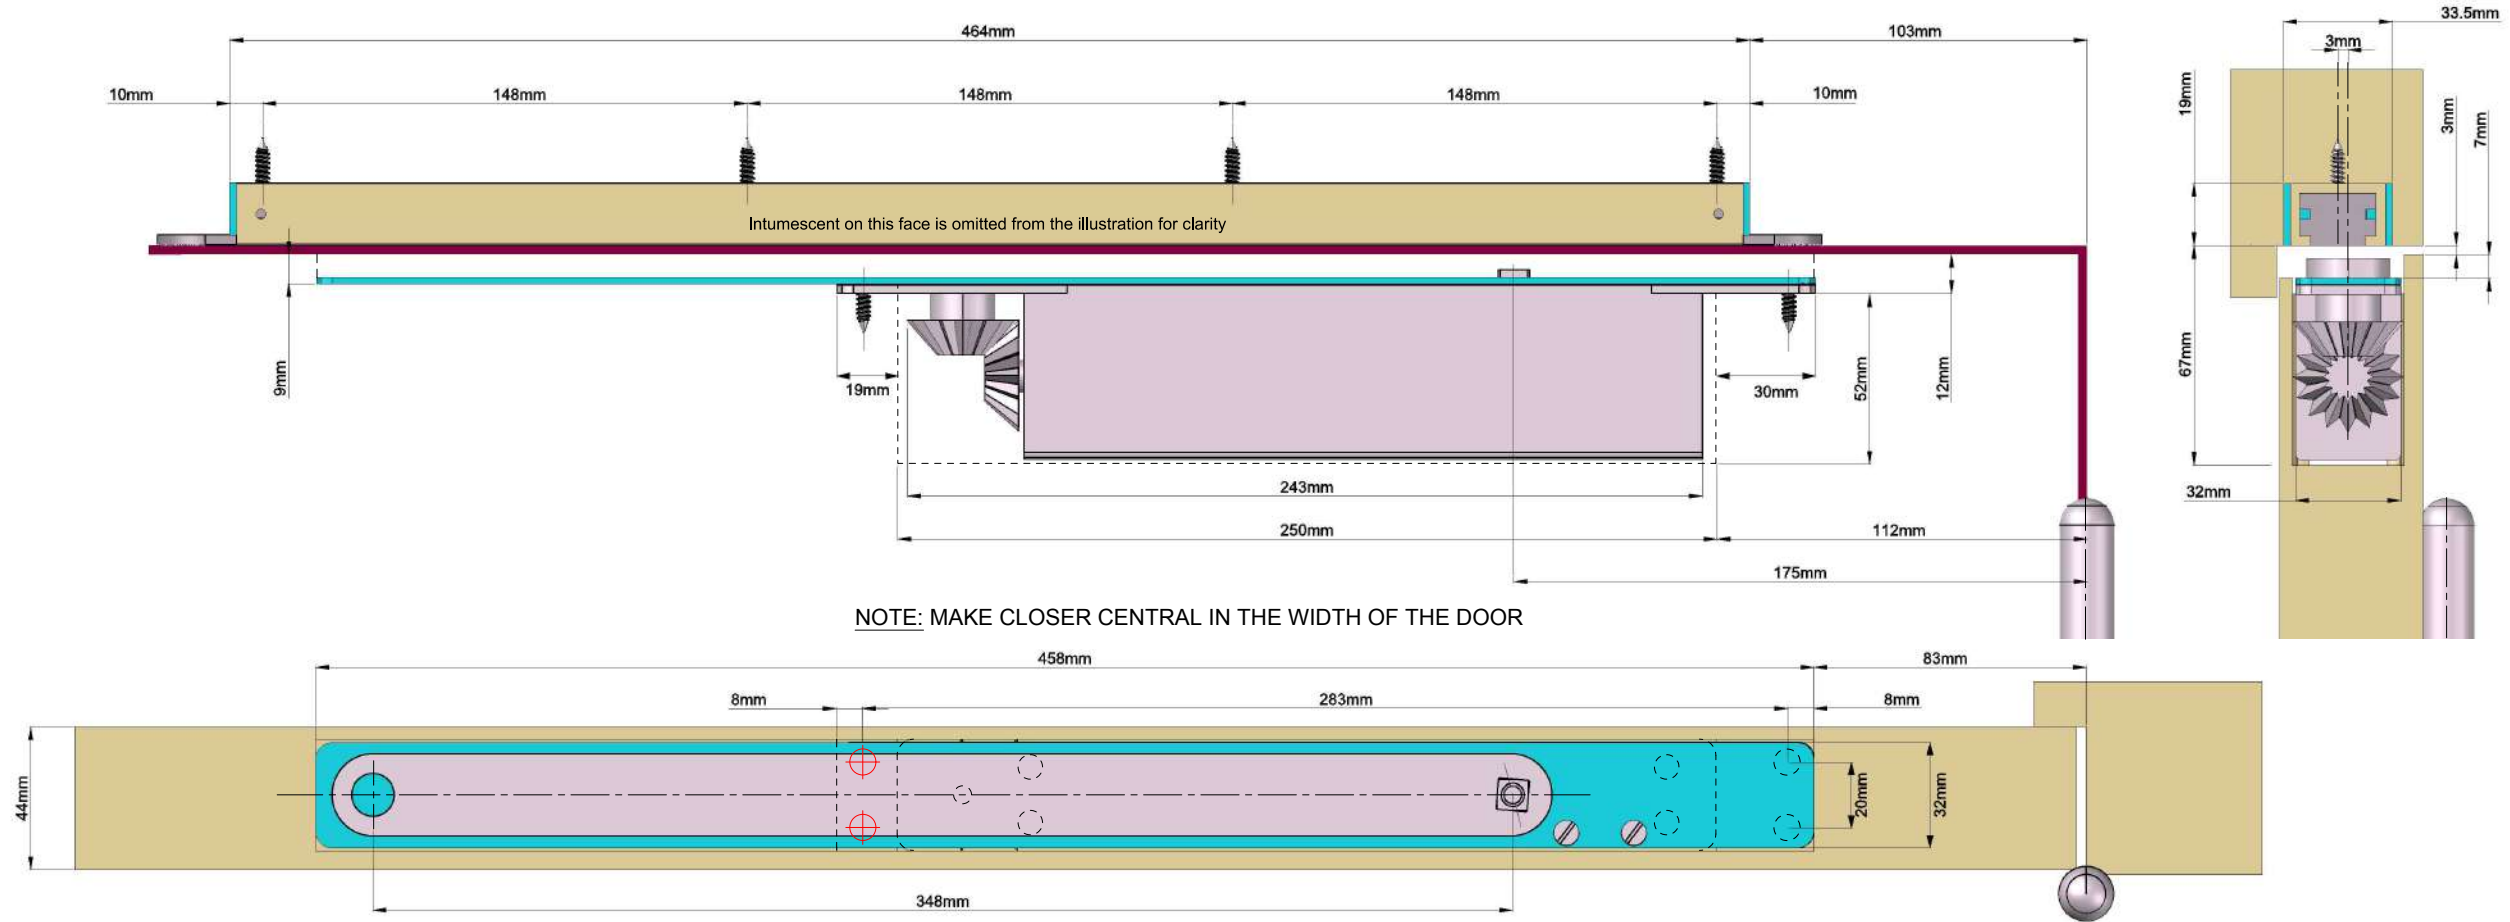

Size 2-4 Power Adjustment

4	+	-	+	+
No. of turns	Size	Max. door width	Max. opening angle	Max weight
-4	2"	850mm	110°	45
*0	3	950mm	110°	60
+6	4	1100mm	110°	80

* FACTORY PRE-SET
■ NOT SUITABLE FOR FIRE DOORS

THE PINION BOLT MUST BE TIGHTENED TO 12NM
FIRE DOORS MUST BE FITTED WITH INTUMESCENT GASKETS