

**PRODUCT DATASHEET**

# Signature™ Composite Decking Boards


RynoTerraceDeck Signature™ capped wood-polymer composite (WPC) Decking Boards have a timeless wood-grain appearance.

For the look of wood without any of the downsides

- Long lasting: will not rot, warp or twist
- Non-slip and splinter-proof
- Low-maintenance: no need to treat or stain
- Manufactured from FSC® certified wood

**DECK BOARD FINISHES**

- 4 distinctive colour choices available
- Fully reversible boards for greater design possibilities (Silver Birch paired with Ebony, Teak paired with Mahogany)
- Corner trim available (dimensions 50mm x 50mm x 3m)



Metal Clasp  
(for a 4mm gap between boards)



Plastic T-Clip  
(for a 6mm gap between boards)




**ASSEMBLY**

- Quick and simple to install
- Board dimensions 142mm x 22mm x 3m
- Joist spacing 350mm
- Hidden fixings for every application (screws included)

**RECOMMENDED SYSTEM**

We recommend decking is installed on a RynoDeckSupport System.

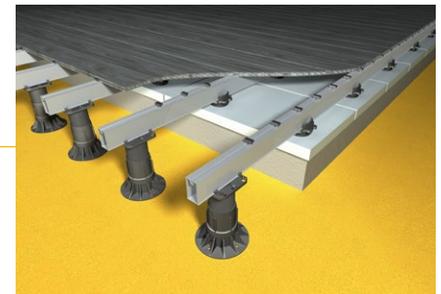

**TECHNICAL SPECIFICATION**

	Test Method	Value
Density	ASTM D792-13 Method B	1.19g/cm <sup>3</sup>
Flexural Strength	ASTM D790-10 Procedure A	34.5 MPa
Flexural Modulus		3510 MPa
Izod Unnotched Impact Strength	ASTM D4812-11	88 J/m
Shore Hardness	ASTM D2240-05 (2010)	D/70/1
Tensile Strength	ASTM D638-14	24.9MPa
Water Absorption	ASTM D570-98 (2010)	0.63%
Coefficient of linear thermal expansion (1/C °)	ASTM D696-08	-30°C-30°C: 33.12 x10 <sup>-6</sup>
Slip Resistance	BS 7976-2	PTV (Dry) 62, PTV (Wet) 39
Reaction to Fire	EN ISO 3501-1	C <sub>fl</sub> - s1



Castlepoint  
Castle Way  
Ellon AB41 9RG

01358 726000  
sales@rynogroup.co.uk  
rynogroup.co.uk