


## SL-Twin. TWIN TANK NON-ELECTRIC WATER SOFTENER.

EAN	5027639 900322
Product Code	900322
People	Up to 5
Under Sink	Yes
Height	495mm
Depth	475mm
Depth (With Connectors)	532mm
Width	215mm
Flow Rate @ 1 bar Pressure Drop	33 L/Minute
Approximate Regeneration Time	12 Minutes
Resin Volume	4.5 Litre x 2
Salt used per regeneration	0.30kg
Water used per regeneration	23 Litres
Inlet & Outlet	3/4" BSP
Drain & Overflow	1/2"
Power Source	None (Water Pressure)
Installation Orientation	Rear
Minimum / Maximum Ambient Temp	2°- 40°C
Minimum / Maximum Working Pressure	1.2 bar min / 6 bar max
<b>* Pressure Reducing Valve Must be Fitted Over 6 bar</b>	
Maximum soft water (at 200 ppm)	750 Litres
Maximum soft water (at 300 ppm)	500 Litres
What salt to use	Block
Warranty	2 Years Parts and Labour*

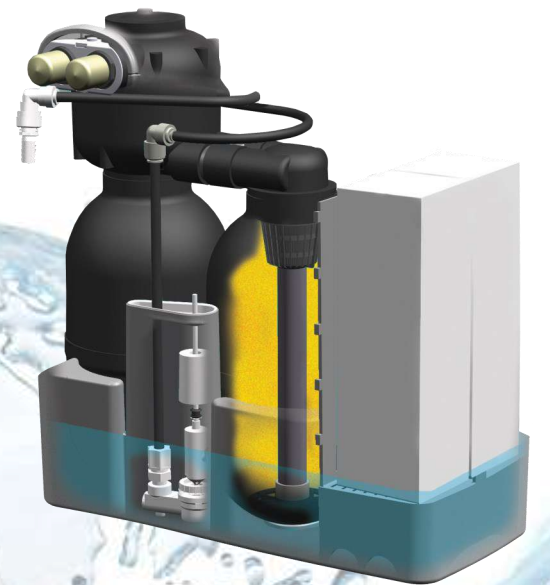

**\* IMPORTANT:** To qualify for warranty the softener must be registered and installed in accordance with the Manufacturers installation instructions. Warranty does not cover incorrect installation or setting up of the softener, site damage or resin contamination.

TECHNICAL HELPLINE 01785 811636