

# Environmental Product Declaration

 **EPD**  
INTERNATIONAL EPD SYSTEM



In accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021 for:

SOPRATHERM PL4000

from

**Soprema Group**



Programme:	The International EPD System, <a href="http://www.environdec.com">www.environdec.com</a>
Programme operator:	EPD International AB
Type of EPD:	Single product EPD
EPD registration number:	EPD-IES-0026916:002
Version date:	2026-03-18
Validity date:	2030-11-14

*An EPD may be updated or depublished if conditions change. To find the latest version of the EPD and to confirm its validity, see [www.environdec.com](http://www.environdec.com)*



## General information

Programme Information	
<b>Programme:</b>	The International EPD® System
<b>Address:</b>	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden
<b>Website:</b>	<a href="http://www.environdec.com">www.environdec.com</a>
<b>E-mail:</b>	<a href="mailto:support@environdec.com">support@environdec.com</a>

<b>Product Category Rules (PCR)</b>
<b>CEN standard EN 15804 serves as the Core Product Category Rules (PCR)</b>
<b>Product Category Rules (PCR):</b> <i>PCR 2019:14 Construction Products – Version 2.0.1</i>
<b>PCR review was conducted by:</b> <i>The Technical Committee of the International EPD® System. See <a href="http://www.environdec.com">www.environdec.com</a> for a list of members</i>
<b>c-PCR:</b> <i>c-PCR-005 Thermal insulation products (EN 16783) (c-PCR to PCR 2019:14)</i>

Third-party Verification
Independent third-party verification of the declaration and data, according to ISO 14025:2006, via:
<input checked="" type="checkbox"/> <b>Individual EPD verification without a pre-verified LCA/EPD tool</b> Third-party verifier: <i>Elisabet Amat, GREENIZE</i> Approved by: International EPD System
Procedure for follow-up of data during EPD validity involves third party verifier:
<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

## Company information

Owner of the EPD:  
SOPREMA Group

Contact:  
Umendra Singh  
[usingh@soprema.co.uk](mailto:usingh@soprema.co.uk)

Address and contact information of the LCA practitioner commissioned by the EPD owner:  
SGS Search, Meerstraat 7, 5473 AA Heeswijk Dinther.

Description of the organisation:  
The SOPREMA Group is an independent group since its inception in 1908, Soprema specializes in the design and implementation of cutting-edge waterproofing systems and thermal and acoustic insulation solutions, in line with the requirements of sustainable construction. SOPREMA Group is a global leader in the construction materials industry, with a comprehensive industrial and commercial network comprising 128 production facilities, more than 120 branch offices, and over 70 authorized distributors. Operating in 90 countries, the Group supports its innovation strategy through 23 dedicated Research and Development (R&D) centers and 48 technical training centers worldwide. These facilities are instrumental in transferring over 100 years of technical know-how to new generations of professionals.

SOPREMA's product portfolio is developed through close collaboration between its Marketing and R&D teams to ensure alignment with market demands and evolving regulatory standards. The company's approach emphasizes innovation and continuous improvement, driven by a core focus on sustainable design and environmental responsibility.

SOPREMA provides a broad range of solutions for construction professionals, including synthetic and bituminous waterproofing membranes, thermal and acoustic insulation systems, liquid-applied products, and specialized materials for civil engineering applications. All products are engineered to

deliver high performance in terms of durability, reliability, and longevity.

Environmental sustainability is integral to SOPREMA's business model. The company is committed to an eco-design approach, incorporating life cycle analysis (LCA) as a central component of its product development process. This approach enables the reduction of environmental impacts throughout the product life cycle, from raw material sourcing to end-of-life management.

## Product information

Product name:  
SOPRATHERM PL4000

Product identification:  
SOPRATHERM PL4000

Product description:  
SOPREMA's SOPRATHERM PL4000 is a paper faced PIR thermal insulation board laminated to 12.5 mm tapered edge plasterboard for internally lining roofs and walls. The reference service life for all products is 50 years. No maintenance necessary for reaching the RSL.

The products in this EPD are manufactured at the following production site(s):

1. Lady Lane Industrial Estate, Hadleigh, Ipswich IP7 6BA, United Kingdom

Product detail:  
SOPRATHERM PL4000 consists of a rigid paper-faced PIR insulation board bonded to 12.5 mm tapered edge plasterboard, providing insulation and dry lining in one product for walls or roofs. It has a declared thermal conductivity ( $\lambda_D$ ) of 0.022 W/m·K. Boards are supplied in nominal dimensions of 1200 mm × 2400 mm, with finished product thicknesses of 37.5 mm, 52.5 mm, 62.5 mm, 72.5 mm, and 77.5 mm.

Application: SOPRATHERM PL4000 is suitable for internal wall lining, including dot-and-dab fixing to the inner leaf of cavity walls, as well as lining timber or metal stud walls, and pitched or flat roof interiors.

	PL4000
Thickness	25 ≤ d ≤ 65 mm
Thermal conductivity insulation - λD (W/(m.K)) (EN 12667)	0,022
Thermal resistance - R <sub>d</sub> (m <sup>2</sup> .K/W)	1,20 - 3,00
Length (mm) (EN 822)	2400 ± 10
Width (mm) (EN 822)	1200 ± 7,5
Thickness tolerance - dN (mm) (EN 823)	dN ±3
Density (kg/m <sup>3</sup> )	NPD
Edge profile	straight with tapered edge plasterboard
Compressive strength at 10% deformation (kPa) (EN 826)	NPD
Dimensional stability (%) (EN 1604)	NPD
Long term water absorption by total immersion (%) (EN 12087)	NPD
Reaction to fire (EN 13501-1)	B-s1, d0
Water vapour diffusion resistance - μ (EN 12086)	NPD
Tensile strength perpendicular to faces (kPa) (EN 1607)	NPD
Durability of compressive creep against ageing/degradation (kPa) (EN 1606)	NPD

Further information can be found at [www.soprema.com](http://www.soprema.com) or [Celotex.co.uk](http://Celotex.co.uk)

**Declared Product and Justification for Representation:**

In accordance with the requirements of the International EPD System and relevant PCR, similar products manufactured by the same company, using the same core production processes, and covered under the same PCR, may be grouped within a single EPD.

Environmental impacts are declared for a single representative product thickness of 25mm.

**UN CPC code:**


54650 Insulation services

**Geographical scope:**

SOPRATHERM Plaster Boards are manufactured at the production sites in Hadleigh and Eggborough, the United Kingdom. The geographical scope considered for the use and end-of-life stages of the product's life cycle assessment has been defined as Global.

**Manufacturing Process**

PL4000 Plasterboard thermal laminate boards are formed through a reaction of components, polyol, Isocyanate (MDI) and various other additives including water, catalysts, blowing agents and flame retardant. These components are poured via the foaming panel onto the base of a paper facing aluminium foil facer and then expands to meet the top layer, before going through a heating and cutting process to create a finished baseboard product with dimension values 1200mm x 2400mm, the baseboard is then bonded to a 12.5mm tapered plasterboard through a secondary manufacturing process creating a 2-in-1 finished product.

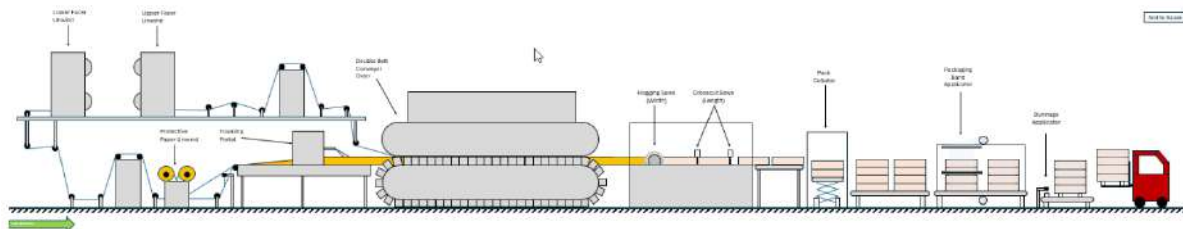

## **LCA information**

### Functional unit / declared unit:

The declared unit is 1 m<sup>2</sup> of installed product.  
The mass of the insulation panel per declared unit for the product PL4025 is 9,84 kg/m<sup>2</sup>.

The SOPRATHERM PL4025 is used as reference product, as it is considered as the most representative product and is among the most produced products in the reference year of this study. This product has a thickness of 25 mm (37,5 mm including the plasterboard) and a R<sub>d</sub> value of 1,20 m<sup>2</sup>.K/W.

### Reference service life:

The reference service life (RSL) of the insulation panels is considered to be 50 years based of the RSL of buildings.

### Time representativeness:

Production data was obtained over the year 2024.


### Database(s) and LCA software used:

ecoinvent 3.9.1; Plastic Europe for MDI and Polyol data; SimaPro 9.5.0.0.

### Description of system boundaries:

Cradle to grave and module D (A + B + C + D).

System diagram:

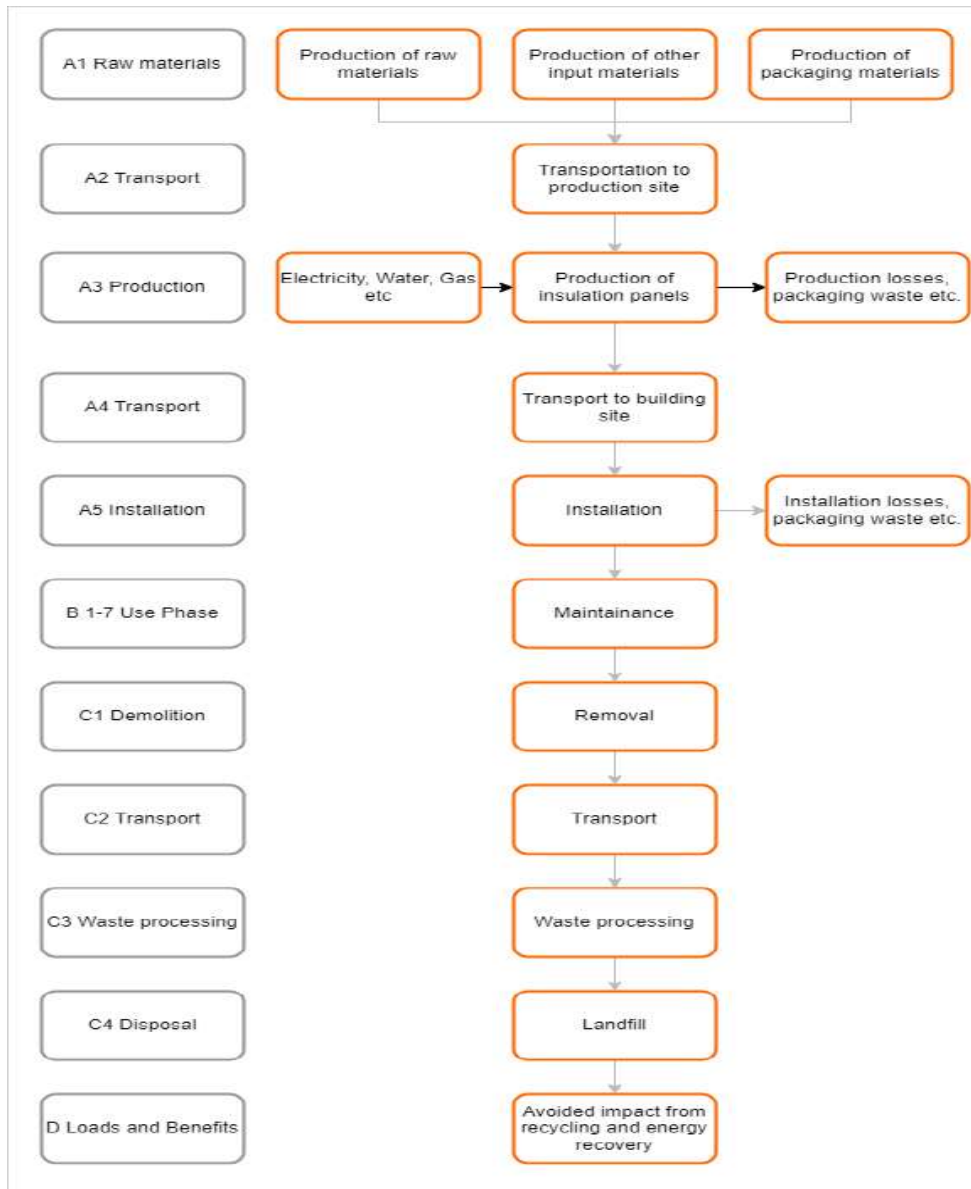

## Product Life Cycle

### Manufacturing and packaging (A1-A3):

Modules A1–A3 cover the product stage, including the extraction and processing of raw materials (A1), transport to the manufacturing site (A2), and the manufacturing processes (A3). The environmental impacts associated with this stage include:

- Production of raw materials and ancillary substances used in the manufacturing of the product and its packaging.
- Energy consumption and fuel use during manufacturing.
- Emissions and waste generated during production.
- Material losses during manufacturing and electricity transmission.

The primary raw materials used in the production of the SOPRATHERM insulation boards include polyol, methylene diphenyl diisocyanate (MDI), various additives, aluminium foil facers, and adhesives. Plastic film is used for packaging the finished product. The packaged product is stored and transported using expanded polystyrene (EPS) bearers and wooden pallets.

### Transport (A4):

This module includes the transportation of finished SOPRATHERM insulation boards from production sites to customers across various regions in Europe. The distribution routes vary by product and production location. Soprema provided detailed data on distribution distances, which were used to calculate transport impacts. Although some shipments may involve overseas transport (e.g., via ferry or the Eurotunnel), transport by lorry was conservatively assumed as it covers the largest share of products.

The average transport distances for each production site are summarised below:

Production location	Distance A4 (km)
Hadleigh	212
Eggborough	335

### Installation (A5):

Installation of SOPRATHERM insulation panels is performed manually. Panels are typically fixed using mechanical fasteners or adhesive bonding, depending on the application. Due to the high variability in installation methods, these processes are excluded from the study. However, an average installation loss of 2% is assumed.

This module also includes the end-of-life treatment of packaging materials, knowing: pallet, plastic film, and EPS bearers. Disposal scenarios are based on the UK's Extended Producer Responsibility for Packaging guidance published by DEFRA.

Material	Incineration	Recycling
Paper	19%	81%
Wood	61%	39%
Plastic	49%	51%
PIR bearers	49%	51%

### Product use and Maintenance (B1-B7):

No maintenance is required once the product has been installed. SOPRATHERM insulation boards are known for their durability and can remain effective throughout the service life of a building, provided they are properly installed and protected from ultraviolet (UV) exposure and physical damage.

### End of life (C1-C4):

At the end of life, the insulation panels are assumed to be manually removed without significant energy or resource consumption.

The waste is first transported by lorry to a waste sorting facility, from the sorting facility, the materials are then transported to a landfill site with a total transport distance of 80 km. The transport is modelled using lorry transport as the most common method. It is assumed that 100% of the product waste is sent to landfill for final disposal.

### Benefits Beyond the System Boundary (D):

Module D accounts for potential environmental

benefits from energy recovery and material recycling processes that occur beyond the system boundary. These benefits are modelled as avoided burdens, representing the substitution of conventional energy sources such as district heating and electricity.

#### Cut-off Criteria:

The study does not exclude any modules or processes which are stated mandatory in the EN 15804:2012+A2:2019 and the applied PCR. The study does not exclude any hazardous materials or substances.

The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

#### Allocation, Estimates and Assumptions:

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. In this study, as per EN 15804, allocation is conducted in the following order;

1. Allocation should be avoided.
2. Allocation should be based on physical properties (e.g. mass, volume) when the difference in revenue is small.
3. Allocation should be based on economic values.

Allocation is based on annual production rate and made with high accuracy and precision. The values for 1 m<sup>2</sup> of the product, which is used within this study, are calculated by considering the total product weight for one year of production. The product output is fixed to 1 m<sup>2</sup> and the corresponding amount of product is used in the calculations.

In the production plant, several kinds of products are produced; since the production processes of these products are similar, the annual production percentages are taken into consideration for allocation. According to the

ratio of the annual production of the declared product to the total annual production at the factory, the annual total energy consumption, packaging materials and the generated waste per the declared product are allocated. Subsequently, the produced product output fixed to 1 m<sup>2</sup> and the corresponding amount of product is used in the calculations.

In order to divide impacts over the main products (as declared in this EPD) and B-grade products, economic allocation was applied on the inputs and energy consumption in manufacturing.

Allocation used in Ecoinvent 3.9.1 environmental data sources follows the methodology 'allocation, cut-off by classification'. This methodology is in line with the requirements of the EN 15804 -standard. This LCA study is conducted in accordance with all methodological considerations, such as performance, system boundaries, data quality, allocation procedures, and decision rules to evaluate inputs and outputs. All estimations and assumptions are given below.

Module A1: Within the product stage accurate data has been used. In case products that are not available in the database, those are modelled as close to reality as possible using proxy, representative datapoint.

Module A3: In the plant, different products are produced. Therefore, electricity and natural gas are allocated on yearly consumption and allocated based on mass

For electricity consumption a specific electricity mix purchased from an electricity supplier has been used. The electricity mix originates from renewable sources which consists largely of wind, solar and hydro which has an impact of 3,23E-2 kg CO<sub>2</sub> eq./kWh GWP-GHG.

Module A4: Transportation doesn't cause losses as products are packaged properly. Also, volume capacity utilisation factor is assumed to be 0,5 for the packaged products. Additionally, transportation distances are averaged delivery in the last year.

Module A5: Energy consumption and used ancillary materials during installation are not considered. The end-of-life treatment of packaging materials such as pallets, plastic film, and EPS bearers are based on the scenario given by UK's Extended Producer Responsibility for Packaging guidance published by DEFRA. The distance is assumed as 50 km and the transportation method assumed to be lorry.

Module C1: The impacts of the disassembly from manual dismantling at end-of-life product stage are considered. Default values from PCR are considered (1,1kWh/tonne for demolition).

Module C2: The waste transported distance to the waste sorting facility from the sorting facility, the materials are then transported to a landfill site, with a total distance of 80km.

Module C3, C4, D: According to the manufacturer's information, 100% of waste is taken to landfill for final disposal.

Module D considers the benefits of recycling and energy recovery which replaces district heat and electricity. This only applies to the product's packaging as the product itself is sent to landfill, for which not avoided impacts are considered

Modules declared, geographical scope, share of specific data (in GWP-GHG results) and data variation (in GWP-GHG results):

	Product stage			Construction process stage		Use stage							End of life stage				Resource recovery stage	
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential	
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	
Modules declared	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Geography	GLO	GLO	UK	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO
Primary data used	>13%					-	-	-	-	-	-	-	-	-	-	-	-	-
Variation products	0 %					-	-	-	-	-	-	-	-	-	-	-	-	-
Variation sites	0 %					-	-	-	-	-	-	-	-	-	-	-	-	-

## Data Quality assessment

The inventory analysis was based on a combination of specific and generic data. Site-specific primary data were collected by Soprema for the year 2024, reflecting actual operations and considered to be of high quality and representative of current production conditions. A comprehensive data quality assessment was conducted in accordance with EN 15941. Each dataset was evaluated for representativeness in terms of technology, geography, and time, as well as for completeness and consistency. The raw material datasets sourced from Ecoinvent demonstrated good technological, geographical, and temporal representativeness. The manufacturing phase was modelled using site-specific data that accurately reflect the processes at Soprema’s Eggborough and Hadleigh facilities. No datasets were identified as having poor or very poor data quality.

Process	Source type	Source	Reference year	Data category	Share of primary data, of GWP-GHG results for A1-A3
Manufacturing of product	Collected data	EPD owner	2024	Primary data	3,5%
Generation of electricity used in manufacturing of product	Energy contracts	EPD owner	2024	Primary data	0,3%
Transportation of raw materials to the manufacturing facilities	Collected data	EPD owner	2024	Primary data	1%
MDI production data	Report	Plastics Europe (ISOPA)	2025	Secondary data	0%
Polyol Production data	Report	Plastics Europe (ISOPA)	2025	Secondary data	0%
Production of Facing	Database	Ecoinvent v3.9.1	2020	Primary data	9%
Production of Additives	Database	Ecoinvent v3.9.1	2020	Secondary data	0%
Packaging production	Database	Ecoinvent v3.9.1	2020	Secondary data	0%
Total share of primary data, of GWP-GHG results for A1-A3					13,8%

## Content information

The composition of the product is provided in the table below, along with the packaging material composition.

Product components	Mass, %	Post-consumer material, mass-%	Biogenic material, mass-% and kg C/kg
Plaster board	70-90%	0%	0 % resp. 0
Methylene Diphenyl Diisocyanate (MDI)	5-20%	0%	0 % resp 0
Facings	0-5%	0%	0 % resp 0
Cyclopentane	0-5%	0%	0 % resp 0
Additives	1-20%	0%	0 % resp. 0
TOTAL	100 %	0%	0 % resp. 0
Packaging materials	Mass, kg/m <sup>2</sup>	Mass-% (versus the product)	Biogenic material, kg C/product or declared unit
Film LDPE	6,91E-03	0.07 %	0
Label	5.35E-05	0,00054 %	1,78E-05
Pallet	0,32	3,3 %	0,2085
Cardboard	0.05	0.53 %	0.027
TOTAL	0,38	3.9 %	0,2356

Based on our knowledge, no substance listed as a candidate for Authorization (Candidate List SVHC) or subject to Authorization (Annex XIV - REACH) is contained in the product at a concentration greater than 0.1% weight/ weight.

## Results of the environmental performance indicators

### Mandatory impact category indicators according to EN 15804

The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks. When interpreting the results of the product stage (modules A1–A3), it is important to also consider the outcomes of the end-of-life stage (modules C1–C4). Additionally, biogenic carbon flows leaving the product system in modules A5 and C have already been accounted for and balanced within modules A1–A3.

The results presented are based on 1 m<sup>2</sup> of the product PL4025. This product has a thickness of 25mm and 9,84kg/m<sup>2</sup>

Results per functional or declared unit																
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-total	kg CO <sub>2</sub> eq.	6,86E+00	2,03E-01	8,71E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,72E-03	7,59E-02	0,00E+00	9,63E-01	-6,69E-03
GWP-fossil	kg CO <sub>2</sub> eq.	6,74E+00	2,02E-01	8,68E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,72E-03	7,58E-02	0,00E+00	9,63E-01	-1,05E-02
GWP-biogenic	kg CO <sub>2</sub> eq.	6,31E-02	6,78E-05	1,35E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	5,17E-07	2,54E-05	0,00E+00	2,84E-04	3,46E-03
GWP-luluc	kg CO <sub>2</sub> eq.	6,40E-02	9,87E-05	1,47E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	4,18E-07	3,70E-05	0,00E+00	2,58E-05	3,37E-04
ODP	kg CFC11 eq.	1,26E-05	4,59E-09	2,35E-07	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	5,91E-11	1,72E-09	0,00E+00	2,98E-09	-1,97E-10
AP	mol H <sup>+</sup> eq.	3,45E-02	5,01E-04	2,42E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,45E-05	1,88E-04	0,00E+00	8,31E-04	-1,17E-04
EP-freshwater	kg P eq.	3,05E-04	1,70E-06	1,14E-05	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,34E-08	6,35E-07	0,00E+00	9,52E-07	-9,99E-07
EP-marine	kg N eq.	7,51E-03	1,34E-04	8,51E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,60E-05	5,01E-05	0,00E+00	1,16E-02	2,75E-05
EP-terrestrial	mol N eq.	7,51E-02	1,40E-03	6,46E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,74E-04	5,25E-04	0,00E+00	3,82E-03	-3,09E-04

POCP	kg NMVOC eq.	2,46E-02	8,18E-04	3,39E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	5,14E-05	3,06E-04	0,00E+00	1,51E-03	-1,25E-04
ADP-minerals & metals *	kg eq. Sb	1,21E-05	5,66E-07	2,29E-06	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,30E-09	2,12E-07	0,00E+00	4,63E-07	-2,15E-08
ADP-fossil*	MJ	1,17E+02	3,07E+00	1,30E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	4,87E-02	1,15E+00	0,00E+00	2,50E+00	-3,53E-01
WDP*	m <sup>3</sup>	1,66E+00	1,47E-02	8,17E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,05E-04	5,49E-03	0,00E+00	1,19E-02	-4,80E-04

Acronyms  
 GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption

\* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

### Additional mandatory and voluntary impact category indicators

Results per functional or declared unit																
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG <sup>1</sup>	kg CO <sub>2</sub> eq.	6,86E+00	2,03E-01	8,71E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,72E-03	7,59E-02	0,00E+00	9,63E-01	-6,69E-03

### Resource use indicators

Results per functional or declared unit																
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
PERE	MJ	1,18E+01	4,49E-02	2,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,77E-04	1,68E-02	0,00E+00	1,96E+01	-1,15E+00
PERM	MJ	2,05E+01	0,00E+00	1,19E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,93E+01	0,00E+00
PERT	MJ	3,23E+01	4,49E-02	8,09E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,77E-04	1,68E-02	0,00E+00	3,11E-01	-1,15E+00
PENRE	MJ	9,88E+01	3,27E+00	1,38E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	5,18E-02	1,22E+00	0,00E+00	2,51E+01	-3,70E-01
PENRM	MJ	2,23E+01	0,00E+00	8,53E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,24E+01	0,00E+00
PENRT	MJ	1,21E+02	3,27E+00	1,39E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	5,18E-02	1,22E+00	0,00E+00	2,64E+00	-3,70E-01
SM	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

<sup>1</sup> This indicator accounts for all greenhouse gases except biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. As such, the indicator is identical to GWP-total except that the CF for biogenic CO<sub>2</sub> is set to zero.

NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	m <sup>3</sup>	5,86E-02	4,50E-04	2,83E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,45E-06	1,69E-04	0,00E+00	3,40E-03	-2,40E-05
Acronyms	<p>PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water</p>															

## Waste indicators

Results per functional or declared unit																
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste disposed	kg	4,73E-04	1,91E-05	7,66E-05	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,28E-07	7,15E-06	0,00E+00	1,10E-05	-3,27E-07
Non-hazardous waste disposed	kg	1,16E+00	2,69E-01	1,17E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	6,97E-05	1,01E-01	0,00E+00	9,47E+00	-7,16E-04
Radioactive waste disposed	kg	1,03E-03	9,36E-07	2,14E-05	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	5,33E-09	3,51E-07	0,00E+00	4,20E-06	-1,59E-06

## Output flow indicators

Results per functional or declared unit																
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Material for recycling	kg	0,00E+00	0,00E+00	5,33E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for energy recovery	kg	0,00E+00	0,00E+00	2,22E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy, electricity	MJ	0,00E+00	0,00E+00	8,61E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

Exported energy, thermal	MJ	0,00E+00	0,00E+00	1,48E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
--------------------------	----	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------

## Single Score value

The single score value presents the result obtained after characterisation using a common reference impact, followed by aggregation into a single score that assigns different weights to various impact categories. It is calculated using JRC Environmental Footprint (EF) weighting factors

<b>Single Score</b>	1,37E+04
---------------------	----------

## Additional environmental information

### Sensitivity analysis for variation in thickness

Variation in the Climate Change total values for the insulation boards with different thickness compared to the representative was analysed, resulting in the table below. In order to understand the consequences for the Climate

Change total score, the following formula is used.

$$Y = X * \text{Variation}$$

Where:

**X** – environmental impact value obtained for the representative product

**Y** – interpolated value for the new board thickness

Product range name	Board thickness (mm)	Variation
SOPRATHERM PL4000	25	1,00
	40	1,24
	50	1,39
	60	1,48
	65	1,56

## ABBREVIATIONS

All abbreviations used in the are presented as below.

Abbreviation	Definition
<b>General Abbreviations</b>	
EN	European Norm (Standard)
EF	Environmental Footprint
GPI	General Programme Instructions
ISO	International Organization for Standardization
CEN	European Committee for Standardization
CPC	Central product classification
GRI	Global Reporting Initiative
SVHC	Substances of Very High Concern
ND	Not Declared
DEFRA	Department for Environment, Food & Rural Affairs
PCR	Product Category Rules
LCA	Life Cycle Assessment
PIR	polyisocyanurate
MDI	Methylene diphenyl diisocyanate
UV	ultraviolet

## References

c-PCR-005 Thermal insulation products (EN 16783)

General Programme Instructions of the International EPD® System. Version 5.0.

PCR 2019:14. Construction products. Version 2.0.1

Ecoinvent version 3.91. [www.ecoinvent.org](http://www.ecoinvent.org)

EN 15804:2012+A2:2019 Sustainability of construction works - Environmental product declarations – Core rules for the product category of construction products”.

ISO 14040:2006 Environmental management — Life cycle assessment — Principles and framework and Requirements and Guidelines. ISO 14044:2006

ISO 14025: 2006. Environmental labels and declarations — Type III environmental declarations — Principles and procedures

RSL: Bouwwerken Bepalingsmethode Milieuprestatie, “STICHTING NATIONALE MILIEUDATABASE,” 2025.

## VERSION HISTORY

Original Version of the EPD, 2025-11-14

Version 2 – minor editorial changes, 2026-03-18

