

Brad type: F16 (16 Gauge) 20° Angled Brads  
Wire Ø: 1.60mm






## Suitable for the following tools\*:

Paslode FN16A 65  
IM65A F16 (Lithium)  
IM250A

*\*please check staple length compatibility with each tool before use*



Brad lengths available: 32mm – 64mm  
Brads per strip: 50

## CORROSION PROTECTION

| Finish                                      | Usage Environment   | Label Colour on Packaging |
|---|---|---------------------------|
| Zinc Galv                                   | INDOOR                                 | Blue                      |
| Stainless Steel A2<br>AISI 304 / WNr 1.4301 | INDOOR, COVERED<br>OUTDOOR & OUTDOOR   | Yellow                    |
| Stainless Steel A4<br>AISI 316 / WNr 1.4401 | INDOOR, COVERED<br>OUTDOOR & OUTDOOR  | Yellow                    |

## BRAD PROPERTIES / DIMENSIONS

Tensile strength of wire: min 650 N/mm<sup>2</sup>  
Wire diameter (d): 1.60mm  
Flattened wire dimension: (A): 1.35mm  
(B): 1.60mm  
Head height (D): 0.75mm  
Head width (C): 3.10mm  
Strip length (LP): 50 brads  
Standard point: Diamond  
Standard brad lengths (Lh): 32mm – 64mm

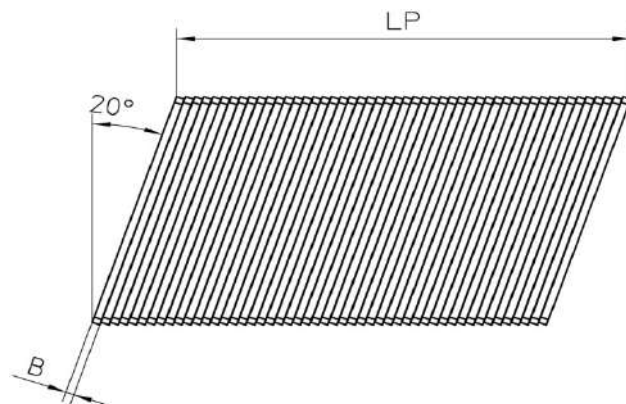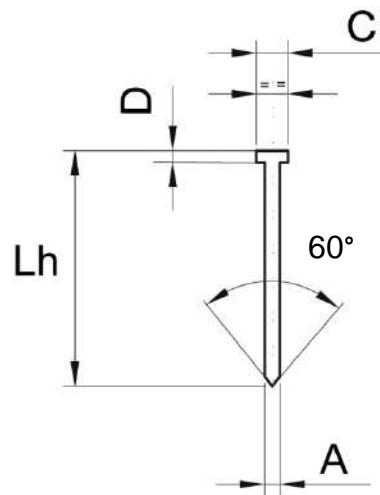

## BRAD LENGTHS AVAILABLE\*

| Finish                                      | Lengths Available<br>*Other lengths on request |
|---|--|
| Zinc Galv                                   | 32mm, 38mm, 45mm, 51mm, 64mm                   |
| Stainless Steel A2<br>AISI 304 / WNr 1.4301 | 32mm, 38mm, 50mm, 64mm                         |
| Stainless Steel A4<br>AISI 316 / WNr 1.4401 | 32mm, 38mm, 50mm, 64mm                         |