VENTUS

Insulated roof terminals for heat recovery ventilation systems

ubbink
Build smart.

Introduction

The Ventus is a new generation of clever insulated roof terminals developed for heat recovery ventilation systems for residential and small commercial buildings. It comes in one colour and in four installation kits for either a range of pitched or flat roof applications. Excellent performance on pressure loss comes standard and contributes to a higher ventilation efficiency and lower energy consumption thus saving costs for the homeowner. The Ventus is a smart and sustainable choice for heat recovery ventilation systems and a range of other ventilation applications.

Features

- Wide range of pitched roof applications (15–55°) with integrated tile base
- Quick and easy installation due to clever perpendicular roof penetration
- Designed to fit to Aerfoam 160 mm & 200 mm (adaptors to fit to 150 mm and 180 mm)
- High performance, optimised pressure loss
- Smart design prevents snow and rain ingress by higher outlet and smart drains

Technical details	
Product specification	Insulated roof terminal for mechanical ventilation with heat recovery (MVHR) in residential and small commercial buildings
Diameter	200 mm with adaptor to 180 mm 160 mm with adaptor to 150 mm
Roof angle	15°–55°
Type of connection	Socket-Spigot
Available colours	Black/Red
Weather resistance	All conditions (including UV)
Materials	
Terminal	PP
Insulation	EPS
Insulated ductwork	EPE (Aerfoam)
Pitched roof tile	PP, PA and Ubiflex lead-free flashing
Flat roof tile	Aluminium
Adaptors	
200 mm	200/180 mm
160 mm	160/150 mm
Accessories	
Mounting bracket	
Airtight seals	





Pitched roof solution with perpendicular roof penetration (Black/Red)



Flat roof solution

© 2025 - Ubbink Centrotherm Group | Content is subject to change without notice | Availability and configurations may differ per country | UB-2025-07-V01-UK-EN

Ubbink (UK) Ltd • info@ubbink.co.uk • www.ubbink.com

VENTUS


Insulated roof terminals for heat recovery ventilation systems

ubbink
Build smart.


Technical details


Dimensions	160 (150)	200 (180)
A [mm]	150	180
B [mm]	192	232
C [mm]	518	531
D [mm]	425	413
E [mm]	600	600
F [mm]	550	550
G [mm]	396	396
H [mm]	416	416
I [mm]	381	381
J [mm]	531	531

Ventus flat roof solution

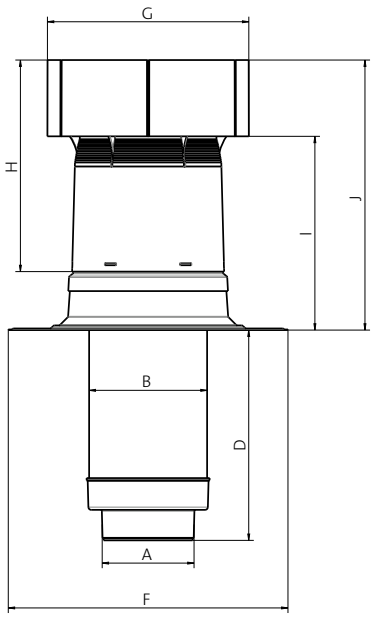

Ventus pitched roof solution

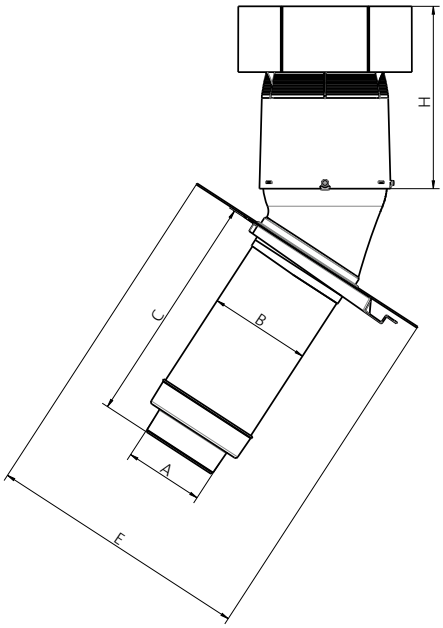

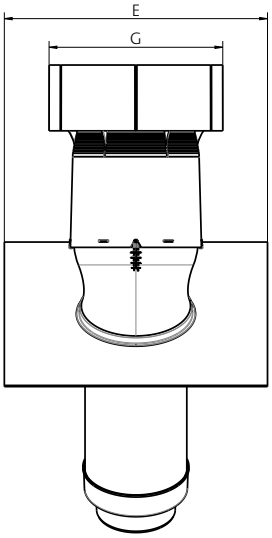

© 2025 - Ubbink Centrotherm Group | Content is subject to change without notice | Availability and configurations may differ per country | UB-2025-07-V01-UK-EN

Ubbink (UK) Ltd • info@ubbink.co.uk • www.ubbink.com

VENTUS

Insulated roof terminals
for heat recovery ventilation systems

ubbink
Build smart.

Air supply	160 (150)					
	diameter		angle			
	150	160	< 3°	15°	35°	55°
			Zeta [-]			
			1,51	1,68	1,74	1,92
Qv (Volume) [m³/h]	v (Velocity) [m/s]		Δp (Pressure loss) [Pa]			
50	0,79	0,69	0,4	0,5	0,5	0,5
100	1,57	1,38	1,7	1,9	2,0	2,2
150	2,36	2,07	3,9	4,3	4,5	4,9
200	3,14	2,76	6,9	7,7	8,0	8,8
250	3,93	3,45	10,8	12,0	12,5	13,7
300	4,72	4,14	15,6	17,3	18,0	19,8
350	5,50	4,84	21,2	23,5	24,5	26,9
400		5,53	27,7	30,8	31,9	35,2
450						
500						
550						
600						

Air supply	200 (180)					
	diameter		angle			
	180	200	< 3°	15°	35°	55°
			Zeta [-]			
			2,44	2,61	2,69	2,79
Qv (Volume) [m³/h]	v (Velocity) [m/s]		Δp (Pressure loss) [Pa]			
50	0,55	0,44	0,3	0,3	0,3	0,3
100	1,09	0,88	1,1	1,2	1,3	1,3
150	1,64	1,33	2,6	2,8	2,8	2,9
200	2,18	1,77	4,6	4,9	5,1	5,2
250	2,73	2,21	7,2	7,7	7,9	8,2
300	3,27	2,65	10,3	11,0	11,4	11,8
350	3,82	3,09	14,0	15,0	15,5	16,1
400	4,37	3,54	18,3	19,6	20,2	21,0
450	4,91	3,98	23,2	24,8	25,6	26,5
500	5,46	4,42	28,6	30,7	31,6	32,8
550		4,86	34,6	37,1	38,2	39,6
600		5,31	41,2	44,2	45,5	47,2

© 2025 - Ubbink Centrotherm Group | Content is subject to change without notice | Availability and configurations may differ per country | UB-2025-07-V01-UK-EN

Ubbink (UK) Ltd • info@ubbink.co.uk • www.ubbink.com

VENTUS

Insulated roof terminals
for heat recovery ventilation systems

ubbink
Build smart.

Air extract	160 (150)					
	diameter		angle			
	150	160	< 3°	15°	35°	55°
			Zeta [-]			
			0,85	1,11	1,17	1,23
Qv (Volume) [m³/h]	v (Velocity) [m/s]		Δp (Pressure loss) [Pa]			
50	0,79	0,69	0,2	0,3	0,3	0,4
100	1,57	1,38	1,0	1,3	1,3	1,4
150	2,36	2,07	2,2	2,9	3,0	3,2
200	3,14	2,76	3,9	5,1	5,4	5,7
250	3,93	3,45	6,1	7,9	8,4	8,9
300	4,72	4,14	8,8	11,4	12,1	12,7
350	5,50	4,84	11,9	15,5	16,5	17,3
400		5,53	15,6	20,3	21,5	22,7
450						
500						
550						
600						

Air extract	200 (180)					
	diameter		angle			
	180	200	< 3°	15°	35°	55°
			Zeta [-]			
			1,61	1,75	1,83	1,96
Qv (Volume) [m³/h]	v (Velocity) [m/s]		Δp (Pressure loss) [Pa]			
50	0,55	0,44	0,2	0,2	0,2	0,2
100	1,09	0,88	0,8	0,8	0,9	0,9
150	1,64	1,33	1,7	1,9	1,9	2,1
200	2,18	1,77	3,0	3,3	3,4	3,7
250	2,73	2,21	4,7	5,1	5,4	5,8
300	3,27	2,65	6,8	7,4	7,8	8,3
350	3,82	3,09	9,3	10,1	10,6	11,3
400	4,37	3,54	12,1	13,2	13,8	14,7
450	4,91	3,98	15,3	16,7	17,4	18,6
500	5,46	4,42	18,9	20,6	21,5	23,0
550		4,86	22,9	24,9	26,1	27,8
600		5,31	27,3	29,6	31,0	33,1

© 2025 - Ubbink Centrotherm Group | Content is subject to change without notice | Availability and configurations may differ per country | UB-2025-07-V01-UK-EN

Ubbink (UK) Ltd • info@ubbink.co.uk • www.ubbink.com