


ULTIMATE

Universal Slurry Primer

An easy to use, polymer enhanced cementitious primer for all types of external Porcelain & Natural Stone

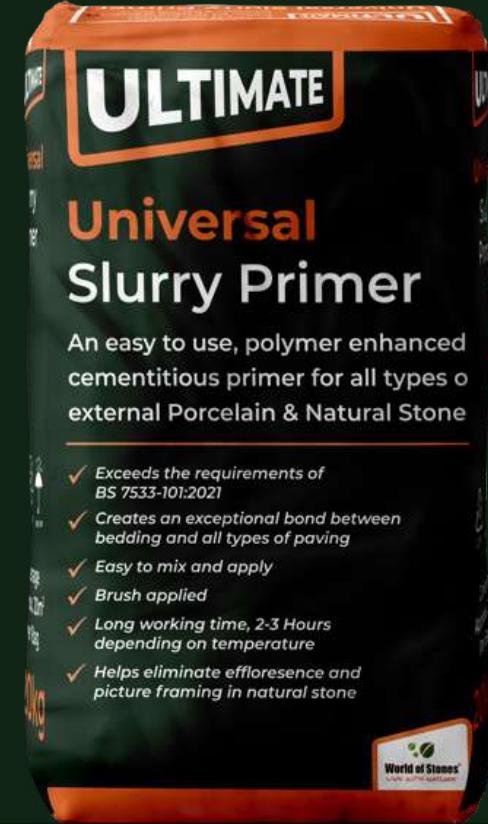

- ✓ *Exceeds the requirements of BS 7533-101:2021*
- ✓ *Creates an exceptional bond between bedding and all types of paving*
- ✓ *Easy to mix and apply*
- ✓ *Brush applied*
- ✓ *Long working time, 2-3 Hours depending on temperature*
- ✓ *Helps eliminate efflorescence and picture framing in natural stone*

ULTIMATE

Application of Universal Slurry Primer

IMPORTANT

Before Starting - Ensure temperature is at least 5°C. Never prime at less than 5°C or if frost or rain is forecast.

Required PPE - Product contains cement, wear a dust mask and safety glasses.

Tools You Will Need - A drill and suitable mixing paddle, stiff paint brush and a measuring jug.

DIRECTIONS FOR USAGE

Please read carefully.

1. In a mixing tub, pour the desired amount of water, and gradually mix in the powder.
2. Use your drill and mixing paddle to mix at a low speed until you attain a smooth, lump-free creamy texture. Allow it to stand for 2 minutes, then mix again to ensure thorough mixing of all polymers into the slurry.
3. Using your brush, carefully cover the back of your slab, ensuring a uniform 2mm coating extending all the way to the edges.
4. Promptly clean off any slurry present on the face or side of the slab by using a sponge and clean water.
5. Lay the slabs promptly after applying the primer. Should not be used on polished surfaces.



**Coverage
Approx. 20m²
Per Bag**

20kg

Storage: Should be stored indoors, in dry conditions, off the ground.

Shelf Life: 8 months in original unopened packaging, if stored between 5-30 degrees.



H318 Causes Serious Eye Damage

H315 Causes Skin Irritation

H317 May Cause an Allergic Reaction