
VELUX roof windows


Standard roof windows

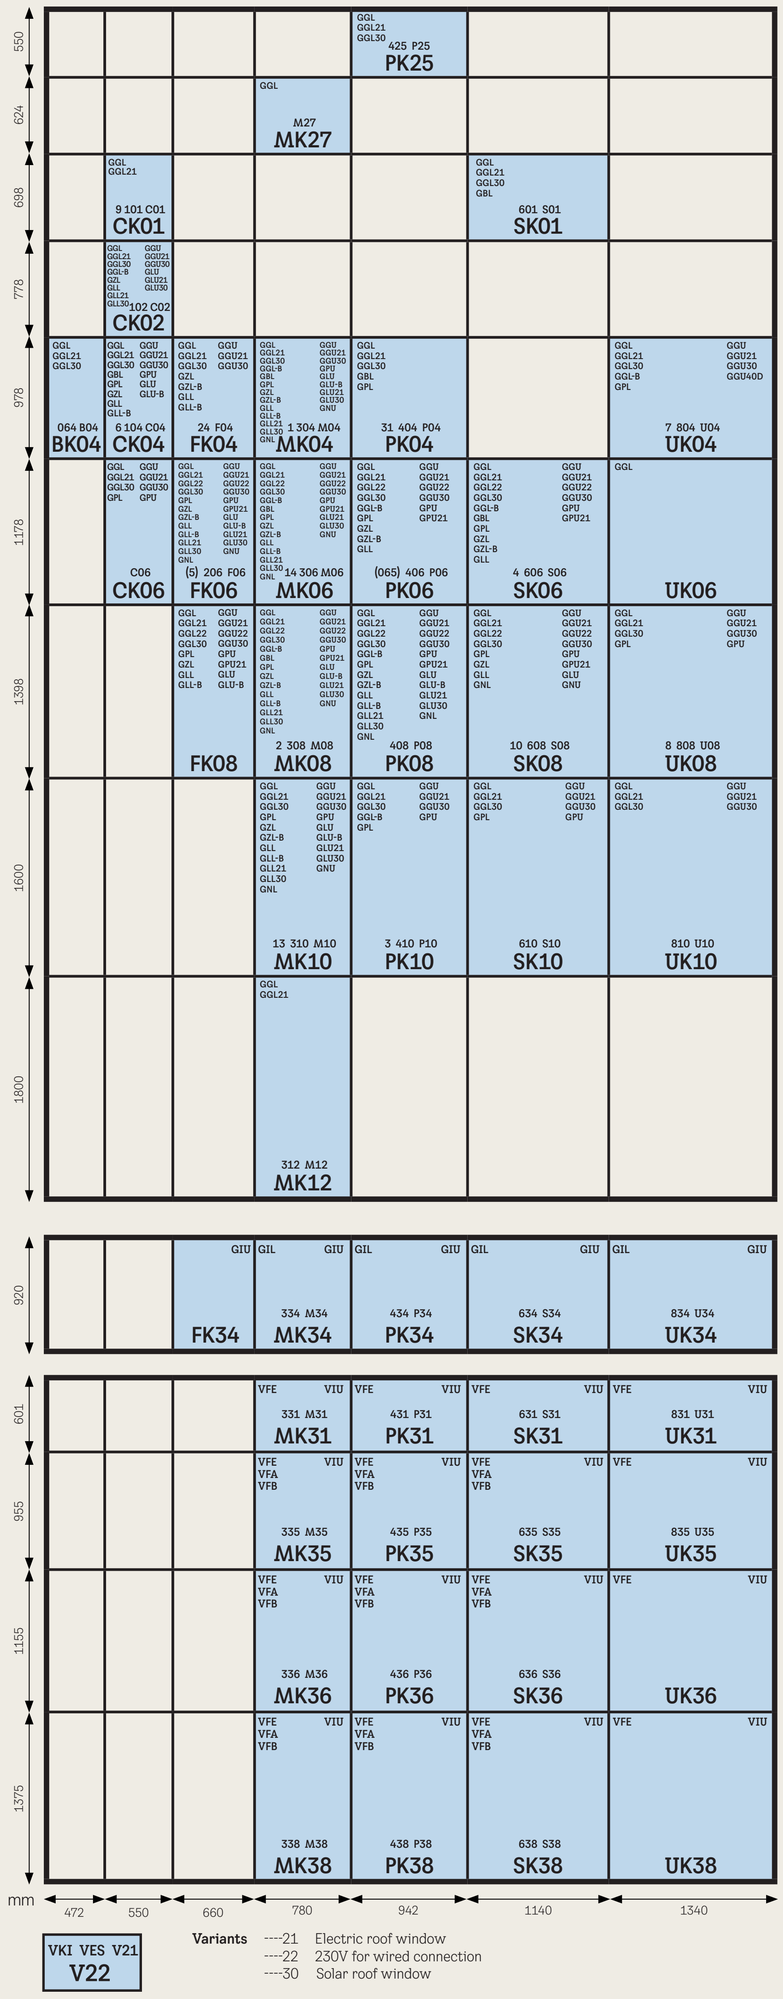

VKI VES V21
V22


Variants
----21 Electric roof window
----22 230V for wired connection
----30 Solar roof window

Special function roof windows

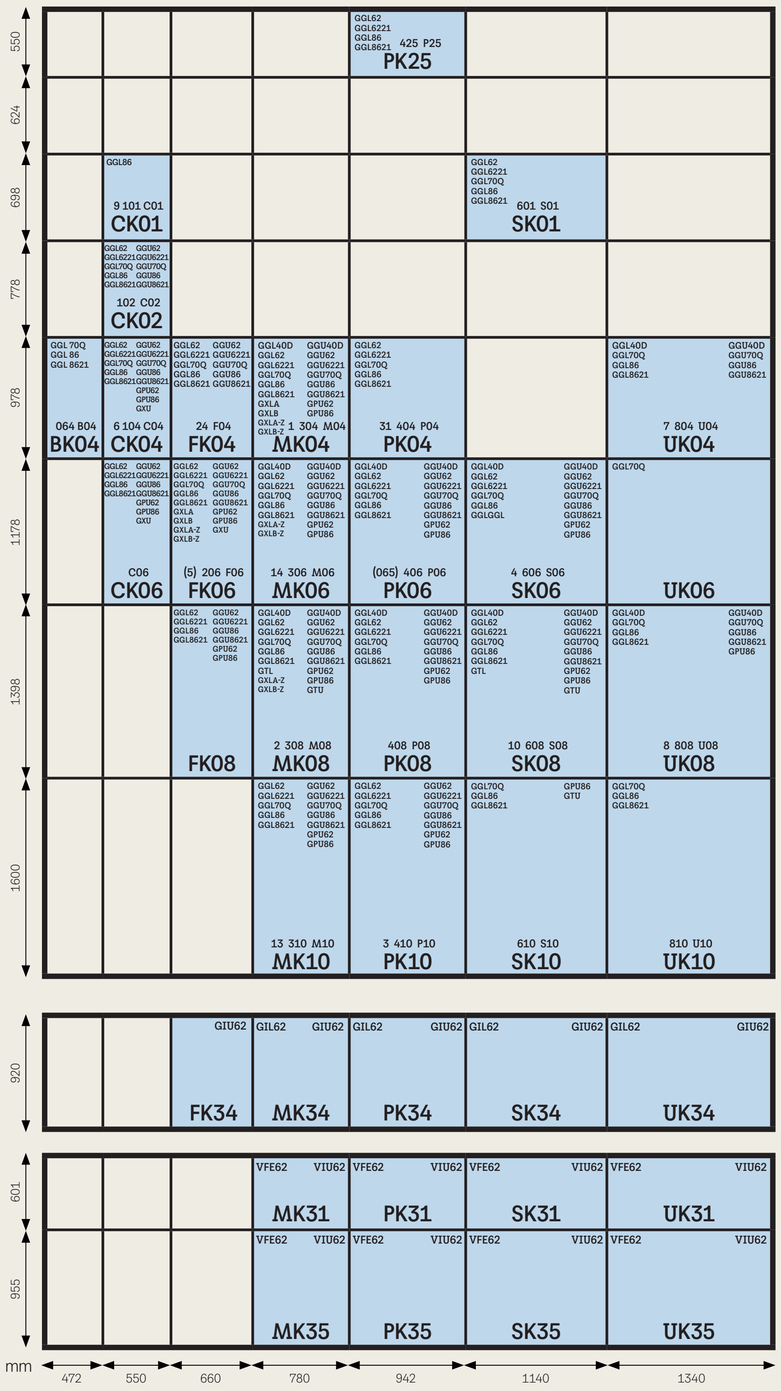

Variants
----40D Smoke ventilation window
--62 Super sound – external sound reduction
--70Q Security – burglary resistant
--86 TripleProtect – snow and ice resistant


2in1 and 3in1 roof windows

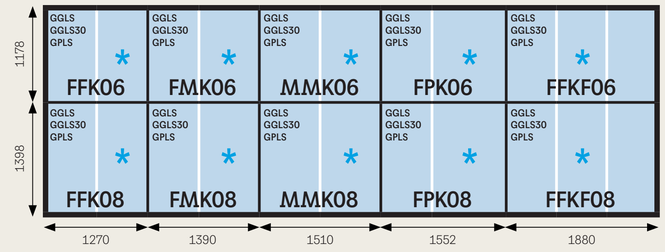


* Fixed element - seen from the inside

Sun tunnels




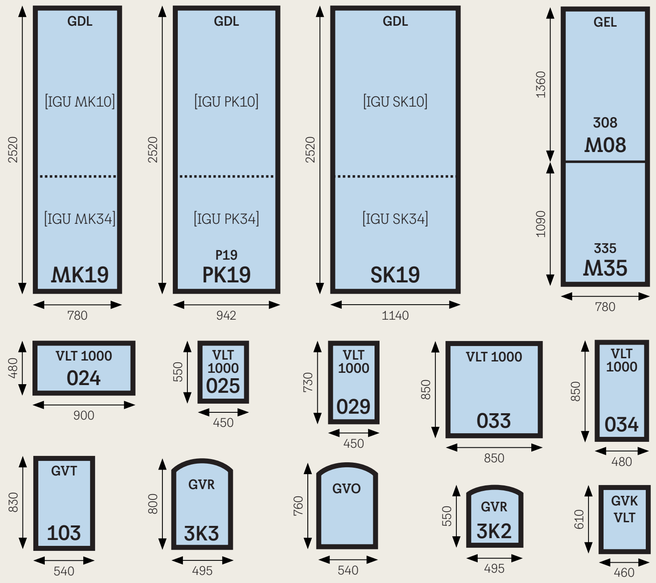

Conservation roof windows

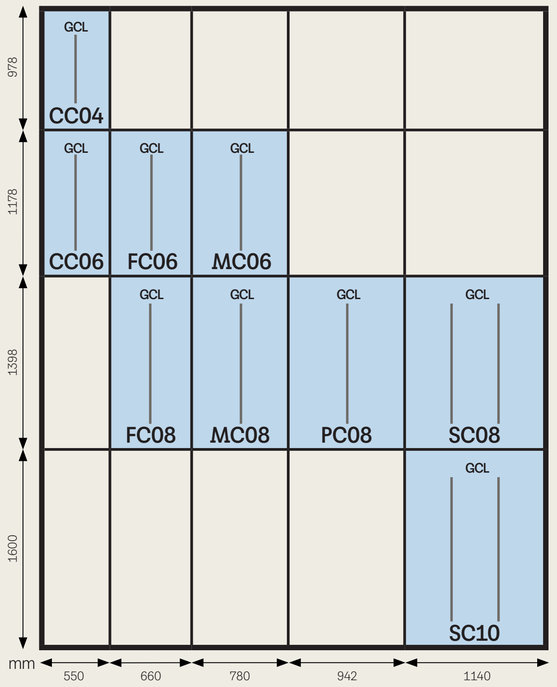

Flat-roof windows

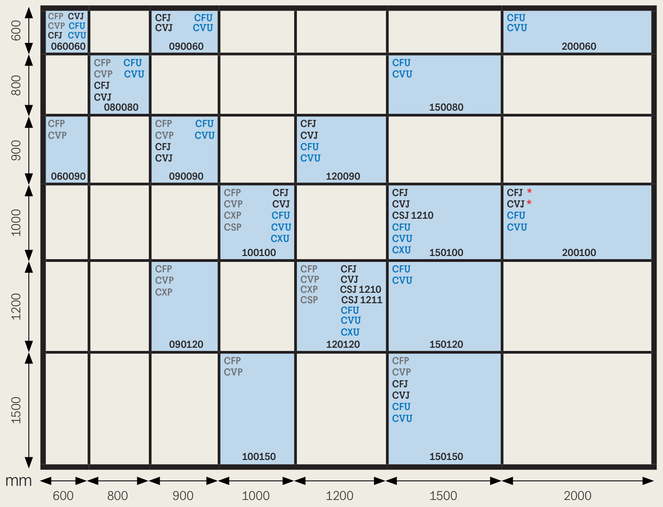

FRW 1.0 New generation glass rooflights 2.0 VELUX domes

* For CFJ, CVJ 200100: Base unit height 150 mm only
Base unit height 150 mm: CFP, CVP, CXP, CSP, CFU, CVU, CXU, CFJ, CVJ
Base unit height 300 mm: CFJ, CVJ, CSJ
Base unit height 500 mm: CFJ, CVJ

November 2025

VAS 454474-2025-11 © 2013, 2025 VELUX GROUP ® VELUX AND THE VELUX LOGO ARE REGISTERED TRADEMARKS ISSUED UNDER LICENCE BY THE VELUX GROUP