


Specification Sheet


 Recommended Fixing Points

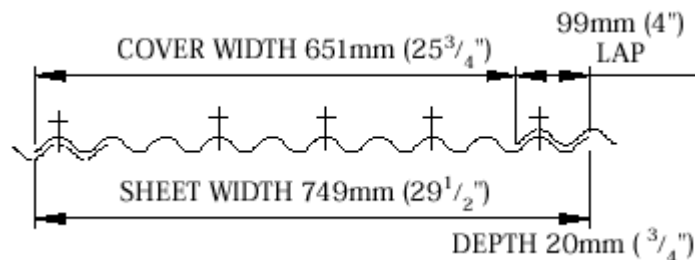

Trilite®
GRP Sheet

Standard 3" ASB* SAB3 Cover width 651mm (25 3/4")

Code	Length
80004	1830mm / 6ft
80009	2440mm / 8ft
80013	3050mm / 10ft

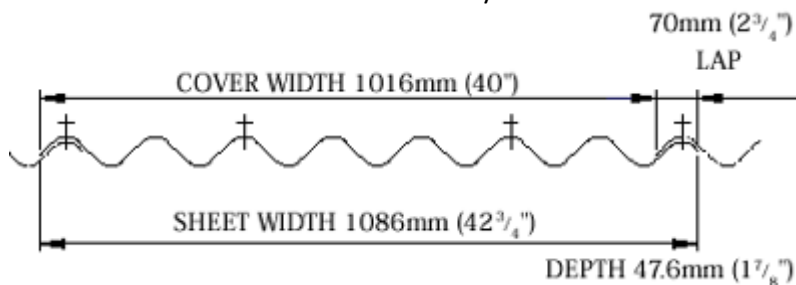

Standard 6" ASB* SAB3 Cover width 1016mm (40")

Code	Length
80054	1830mm / 6ft
80059	2440mm / 8ft
80063	3050mm / 10ft

Technical Information

Trilite	
Chemical Resistance	Good resistance to acids, although strong acids or alkaline conditions should be avoided
Coefficient of Thermal Expansion	22 x10 ⁻⁶
Thermal Properties U Value W/m ² °K	5.7 (Single Skin)
Service Temperature Range	-20°C - +80°C
Fire Performance	Grade 3 SAB