


NEW Envirotile the innovative lightweight interlocking roof tile



GREEN ROOF TILE COMPANY

- Made from reprocessed polymers reliably sourced
- 80% lighter than traditional concrete tile
- Conforms to code of practice for slating and tiling BS5534
- Interlocks with adjacent tiles in 8 places so no tiles can dislodge
- Proven capability for low pitch roofs 12.5° and over

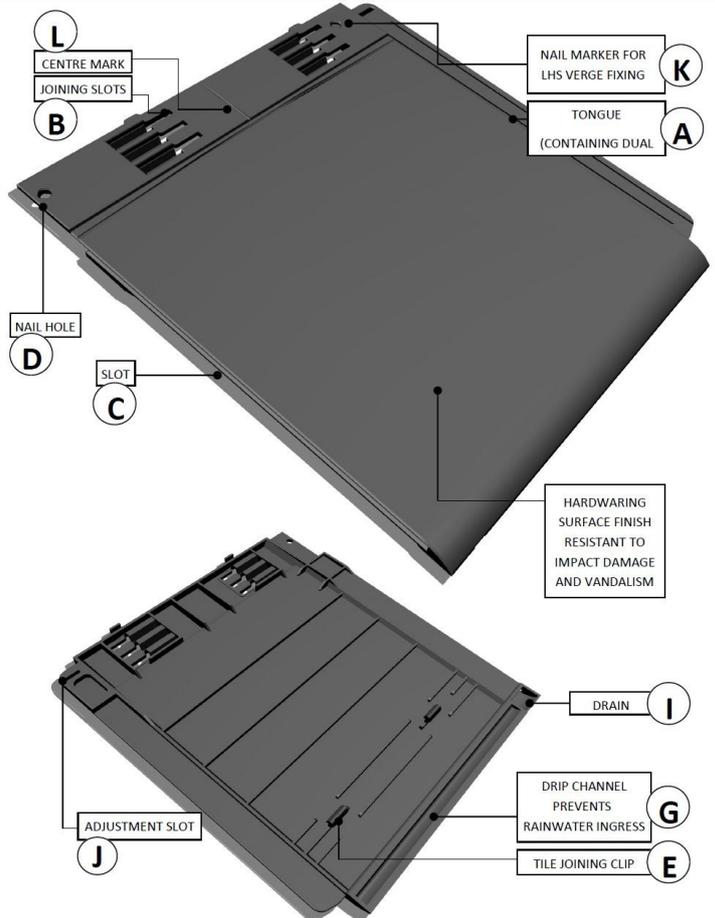

Envirotile Performance:

- 110mph driven rain with no loss of integrity, any dislodgement or breakages
- Achieved a BRE record, with superb performance at pitch levels of just 12.5°
- Over 5 times the uplift resistance compared with conventional roof tiles with standard clip fixings
- Fire resistance test in accordance with BS476: Part 3: 2004, External Fire Exposure Roof Test. Achieved the EXT.S.AA rating, which is the highest rating for resistance to fire spread
- Currently, the only plastic tile that can be laid on a breathable membrane
- Envirotile comprises of approximately 70% reprocessed polypropylene

Specification Support



2D scaled CAD Drawings and 3D models available
0845 2697137



FREE Samples available for this product.
0845 2697137



Pricing: All Prices are EX VAT and EX DELIVERY

- Black Envirotile** - From £2.25 each tile or less depending on volumes
- Premium Colours*** - From £3.00 each tile or less depending on volumes
- *Heather, Slate Grey, Clay Brown, Clay Red

Other Colour Tile Matching Service:

£250 set up service and from £3.45 each tile or less depending on volumes

Facia Eave Bars: From £5.00 each or less depending on volumes

Minimum Order 100 tiles and there after in multiples of 10

Roof Pitch Requirements:

- For roof pitches over 12.5° but under 22.5° you will need a minimum of 14 tiles per m²
- For roof pitches over 22.5° you will need a minimum of 12 tiles per m²
- Eave Bar - An eave bar of 900mm length is required to hold the tiles at bay on the fascia

Technical:

- Envirotile Size - 325mm x 365mm
- Envirotile Weight - 730g

Product Certifications:

- BBA Part Certification
- Conforms to BS 5534:2003
- Conforms to BS 15087:2005



Colour and finish customised to meet customer needs order a free sample today

www.greenrooftilecompany.co.uk
info@greenrooftilecompany.co.uk

0845 269 7137

