

FormFlash



Specially designed to meet the standards of modern roofing

FormFlash is a waterproof flashing material designed to replace traditional lead flashing.

Features and Benefits

- No scrap value.
- Over 50% lighter than Code 4 lead flashing providing easier handling and health and safety advantages.
- Allows flashings up to 10m in length to be installed without joints making it quicker and easier to install.
- Environmentally friendly and non-toxic: no lead, no other heavy metals, no PVC.
- Made of monolithic strong durable SEBS modified bitumen blend.
- Malleable and easy to form.
- Weldable – with hot air gun or FireSmart® flame free welder.
- Easy to cut.
- Life expectancy in excess of 20 years.

Compatibility

We recommend the use of FormFlash Sealant for pointing. Icopal FormFlash and associated products are compatible with most materials normally associated with building works. However solvent based products and timber preservatives containing solvent may soften bitumen and other products and special care should be taken when selecting materials likely to come into contact with FormFlash.

If in doubt regarding compatibility contact Icopal Technical Services.



Site Work

- FormFlash can be worked without the need for protective measures, except for wearing gloves to protect from cuts
- Can be cut with a sharp knife or tin snips
- Secured using FormFlash Fixing Clips

**Flexible waterproof
flashing designed
to replace traditional
lead flashing**



Specially designed to meet the standards of modern roofing

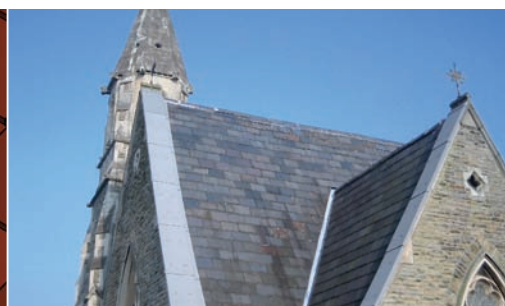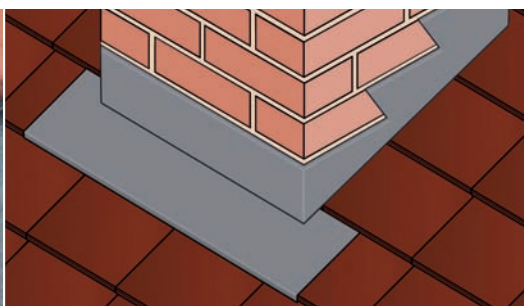

Installation

FormFlash is installed and worked in a similar way to traditional lead flashing. For full installation details contact Icopal Technical Services.

Related Products

- **FormFlash Sealant** – flexible sealant for pointing FormFlash into brickwork.
- **FormFlash Fixing Clips** – replace traditional lead wedges saving time and money.


FormFlash can be installed in all applications where traditional lead would be used including:

- Stepped flashings
- Abutment flashings
- Dormers
- Chimney flashings
- Flat/pitched roof junctions

Associated Products

A range of accessories specially designed to meet the exacting standards of modern flat roofing whilst maintaining the waterproofing integrity of the roof including:

- Roofgard Roof Outlet
- Roofgard Parapet Outlet
- Roofgard Cable and Pipe Duct
- Roofgard Cowled Telescopic Vent
- Roofgard Lightning Conductor Clip
- Roofgard GRP Roof Trims
- Roofgard Terrace Grates
- Roofgard Paving Support System
- Roofgard Terradek
- Roofgard Plant Support System
- Xtra-Seal Sealants and Mastics
- Xtra-Seal Solutions and Compounds
- KwikGuard Edge Protection
- KwikLine Fall Restraint Systems

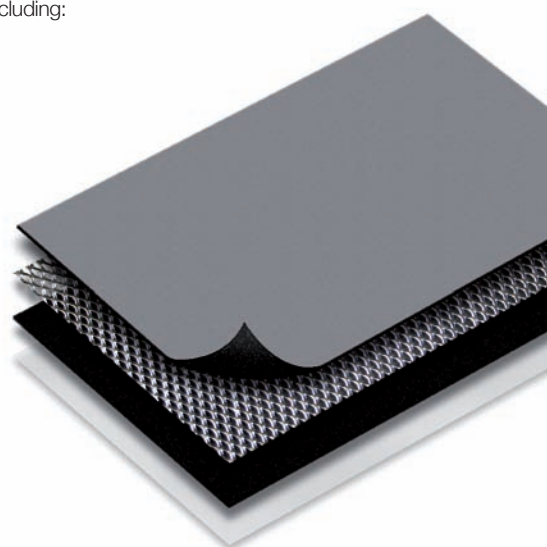

Technical Details

Roll length	10m
Nominal roll widths	120, 150, 200, 250, 300, 450, 650 and 950mm
Other widths available to special order.	
Weight	4.75 kg/m ²
Thickness	4mm
Colour	Grey
Composition	SEBS modified bitumen on a malleable aluminium mesh finished with a fine grey granular finish on the outer face and a polyethylene film on the inner face.
Cold bend	-20°C
Working	Normal temperatures for temperature roofing works. Warm material gently with a flame free heat gun to ease use in cold conditions.
UV Resistance	Accelerated weathering at 90 days no change. Natural weathering on going with no change in excess of 90 days.