

High Flow Vent

Product features & benefits

- · Provide high levels of ventilation
- Vent caps designed to reflect the base tile profile
- Comprehensive range to match most makes of concrete interlocking tiles
- Adaptor and flexipipe available for soil ventilation or mechanical extraction
- Prevents entry of birds and large insects

Area of application

Suitable for:

- · High and low level ventilation
- Soil ventilation or mechanical extraction when used with an adaptor pack

Material

High quality PVCu

Colours

Antique red Brown Grey Terracotta

Dimensions

Please contact the Sales Office for dimensions of individual vents

Weight

Please contact the Sales Office for weight of individual vents

Packaging

10 units per carton 5 cartons per pallet

Product codes


Please consult the Sales Office for full product range and availability

Regulations and certifications

Complies fully with relevant Building Regulations and British Standards

Related products

In closed rafter situations this product should be used in conjunction with Klober eaves ventilation products, for example, Fascia Vents.

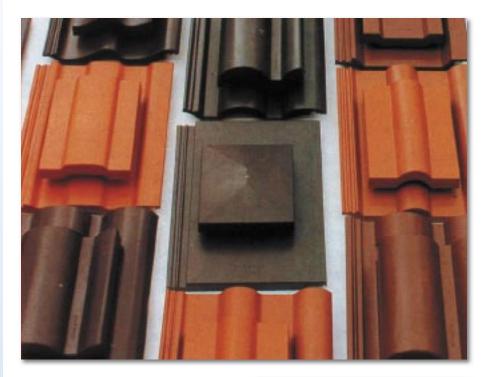

A range of high-flow quality ventilating tiles to suit most popular interlocking roof tiles. Can be used for roof space ventilation at high or low level, or for soil ventilation or mechanical extraction when used with adaptor pack.



Installation

Each carton comes with full fitting instructions.

Performance

| Provides 15,000 mm² effective ventilation area | | |
|--|---------------|--------------------------|
| Vent spacing | 5,000 mm²/m | install at 3.0 m centres |
| | 10,000 mm²/m | install at 1.5 m centres |
| | 25,000 mm²/m | install at o.6 m centres |
| Airflow resistance | 15 litres/sec | 3.5 Pascals |
| | 30 litres/sec | 14 Pascals |
| | 60 litres/sec | 56 Pascals |