

Date: 29 November 1999


No: 8.3.1.5-1

AH10-

[Link to VELUX Information Newsletter](#)

**KEYPAD**

**WLI 130**

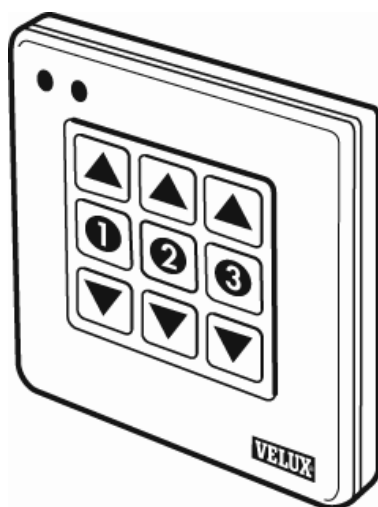

## Application

The keypad WLI 130 can be used for individual operation of three motors or three groups of motors.

WLI 130 consists of:

- Keypad with three rows of buttons
- 6 m 3-core cable for connection to VELUX control units
- Fitting parts

When a VELUX COMBIcontrol control system is extended with one or more WLI 130 keypads, the motors can be operated from different places in the house. Up to five WLI keypads can be connected to each COMBIcontrol control unit.

## Operation

The three rows of buttons of the keypad are numbered to make it clear which motors are operated.

The keypad can either be set so that a motor will travel to end-stop after one press of the corresponding button

(AUTO) or so that it runs only as long as the button is pressed (MAN).

The keypad is equipped with an infrared receiver and is thus prepared for operation with the remote control WLR 100.

## Installation

The keypad is connected to the desired COMBIcontrol control units using the 3-core cable supplied.

- Hidden wiring: The cable is led through a hole in the backplate of the keypad.
- Visible wiring: The cable is led through a hole in the side of the keypad, which is made by removing knock-out.

The keypad has a depth of only 12 mm making near-flush installation on the wall possible.

The connection is shown in the instructions enclosed with the product.

<b>Material</b>	Plastic.
<b>Colour</b>	Keypad: White (NCS 1000). Buttons: Grey (NCS 3000).
<b>Size and weight</b>	Product in packaging: 235 mm x 165 mm x 75 mm (W x H x D), 0.4 kg. Keypad: 81 mm x 81 mm x 12 mm (W x H x D), 0.1 kg.
<b>Installation</b>	The keypad WLI 130 has been designed for indoor installation, but it must not be fitted in surrounding temperatures exceeding 50°C.
<b>Connection</b>	WLI 130 is delivered with 6 m 0.25 mm <sup>2</sup> 3-core cable for connection to VELUX COMBIcontrol control unit. When using a 0.25 mm <sup>2</sup> cable, the distance from the keypad to the control unit is max. 100 m.
<b>Compatibility</b>	WLI 130 can be used with VELUX COMBIcontrol control systems and infra-red remote control WLR 100.
<b>CE approval</b>	This product has been CE approved to indicate that it is in accordance with relevant EU directives.  The product has been tested with other genuine VELUX electrical products, and together with these it meets the requirements of the EMC directive for household, trade and light industry.
<b>Note</b>	In children's rooms and institutions it is recommended to place all operation units out of children's reach and make sure that the window operators can only be activated from keypads where the windows can be supervised simultaneously. The keypad should be set for manual operation (MAN).  This product has been designed for the use with genuine VELUX products. The connection to other products may cause damage or malfunction.  We reserve the right to make technical changes.

<b>Dealer's details</b>	
-------------------------	--