




THE WORLD LEADER IN LADDERS™

hideAway

FOLDING TIMBER LOFT LADDERS
RELEASING SPACE

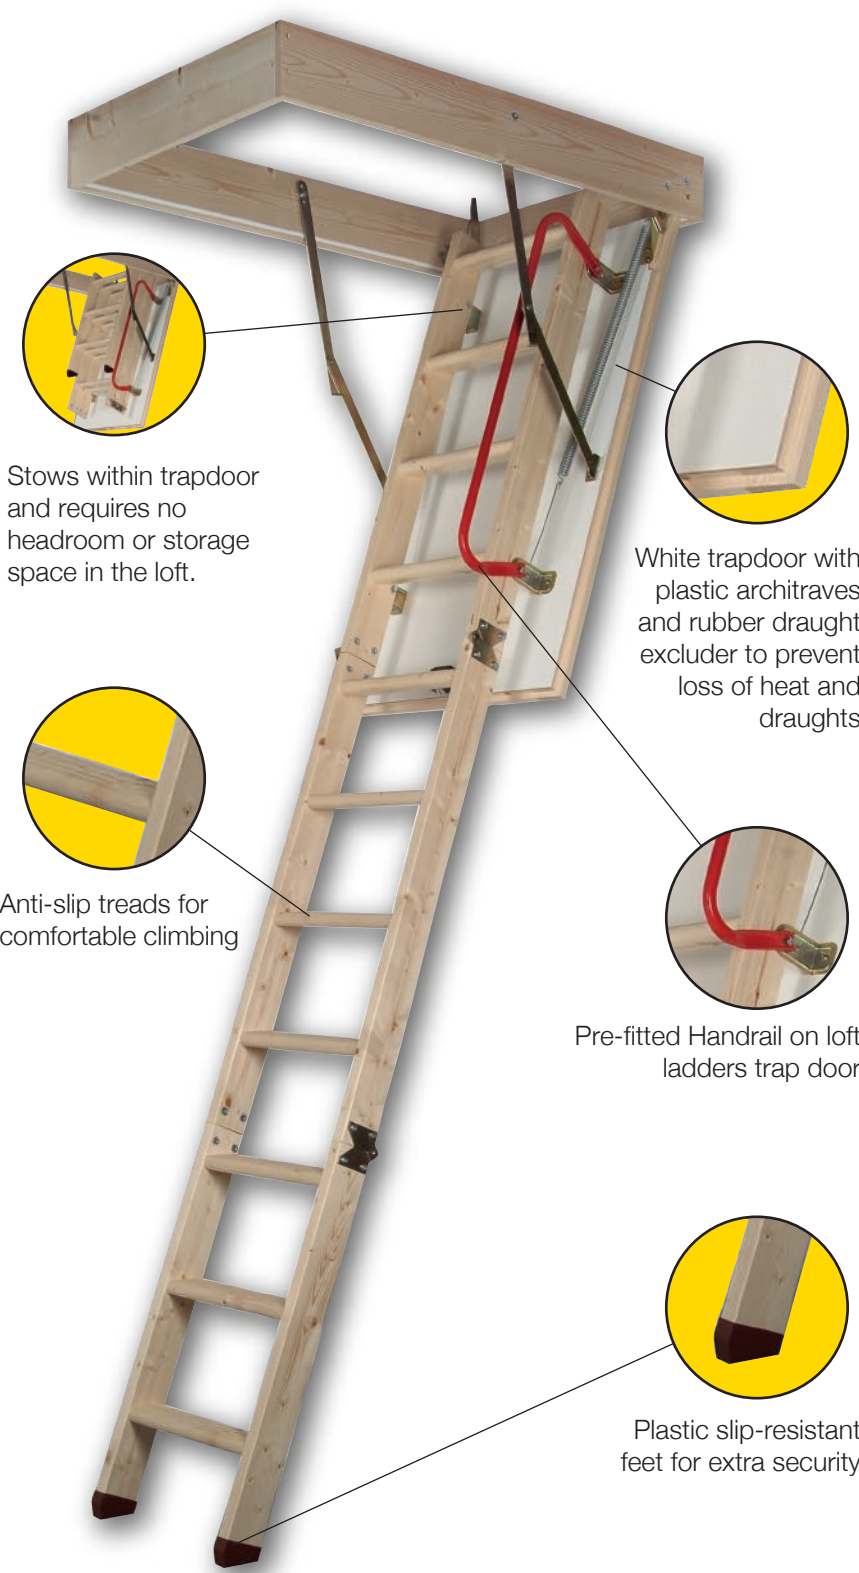

Stows within trapdoor and requires no headroom or storage space in the loft.

White trapdoor with plastic architraves and rubber draught excluder to prevent loss of heat and draughts

Anti-slip treads for comfortable climbing

Pre-fitted Handrail on loft ladders trap door

Plastic slip-resistant feet for extra security



150kg
LOAD CAPACITY
(Load includes user, tools, materials, etc)

EN14975

SPECIFICATIONS

Product name	HideAway
Casing	113 x 54 cm
Type	3-section
Material	Wood
Outlet in cm	136 cm
Max. swing clearance	162 cm
Number of Treads	12
Opening size	113x54 cm
Insulation	30 mm
Material (Casing)	Spruce
Thickness (Casing)	18 mm
Height (Casing)	140 mm
Outside Casing	115x55 cm
Material (Trapdoor)	white/white HDF 2 x 3
Insulation (Trapdoor)	30 mm
Thickness (Trapdoor)	36 mm
Thickness (Treads)	28 mm
Depth (Treads)	82 mm
Width (Treads)	400 mm
Rise (Treads)	250 mm
Material (Treads)	spruce
Material (String)	spruce
Thickness (String)	21 mm
Depth (String)	84 mm
Max. Height closed stair	33.6 cm
Max. Length closed stair	44.8 cm
Max. User Weight	Tested by EN14975 up to 265 kg, work weight 150kg
Test	IFT Rosenheim EN12207 Class 4 @ 600 Pa

NEW

Completely assembled and ready to install.