



Eco S Line

The ultimate timber loft ladder and hatch

The Eco S Line is a 3 section folding timber loft ladder with an insulated draught proof hatch.

- Designed to fit in between UK standard 600mm joist centres
- Tested and certified to EN 14975:2006
- Requires no arc of clearance or storage space in the loft
- Made from solid spruce – FSC and PEFC certified
- White faced trap door
- Rubber draught excluder on casing and trapdoor
- 20mm thick trapdoor insulation reduces heat loss
- Handrail to aid safe climbing
- Slip resistant treads and feet
- Easy operation; includes timber pull and push rod
- Full installation instructions included
- Extension kit available

Edition 1:2009


EN 14975



YOUNGMAN

INNOVATIVE WORK AT HEIGHT SOLUTIONS

youngmangroup.com

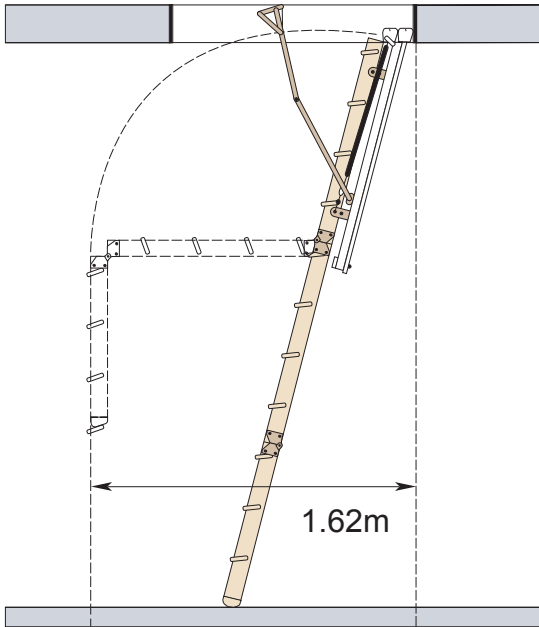

Eco S Line

The ultimate timber loft ladder and hatch

Order codes:

Eco S Line timber loft ladder and hatch	345345
Eco S Line timber loft ladder and hatch extension kit	346345

Specification:

Casing size (m/ft):	
○ Length	1.13/3'9"
● Width	0.55/1'10"
○ Depth	0.14/6"
Opening size	1.15m (3' 9") x 0.57 (1' 10")
Max. landing space	1.37m (4' 6")
Max swing clearance	1.62m (5' 4")
No. of treads	12
Duty rating (kg/st)	150/23.62
Weight	26kg
Min. floor to ceiling height	can be cut to suit
Max. floor to ceiling height	2.81m (9ft 3")
(with extension kit added)	3.51m (11ft 6")
No arc of clearance required in loft	
Insulation coefficient	1.33 W/m ² °C

Your Eco S Line distributor is:

YOUNGMAN

INNOVATIVE WORK AT HEIGHT SOLUTIONS

Youngman Group Limited, The Causeway, Maldon, Essex, CM9 4LJ, United Kingdom

t +44 (0) 1621 745900 **f** +44 (0) 1621 859845

e sales@youngmangroup.com

youngmangroup.com