


FASERFIX®KS 150

FASERFIX®KS 150 up to class F 900, Type 01



F 900

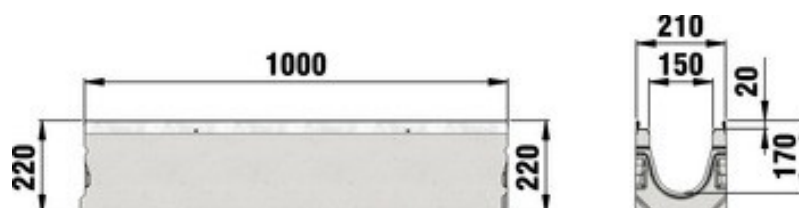

■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Inlaying depth	Drainage cross-section cm ²	Item-no.
1000	210	220	54,47	20	185	11000

■ Product description:

FASERFIX KS 150 Type 01 - Channel made of fibre reinforced concrete, loading capacity from A 15 up to F 900 according DIN V19580 / EN 1433, CE-conform, with galvanised steel angle housing and boltless quick-locking system SIDE-LOCK, without traverse webs in the channel run, with joint for optional sealing, L/W/H 1000x210x220 mm, Item No. 11000

■ Material:

- **Channel body:** FASERFIX fibre-reinforced concrete
- **Angle housing:** strip galvanized steel

■ Type acc. DIN EN 1433:

M

■ Set of rules:

EN 1433

■ Application areas:

- Railway platform
- Facade drainage
- Pedestrian zones
- Gardening and landscaping
- Multi storey car parks
- Industrial buildings
- Cable ducts
- Sewage plants
- Market squares, markets



- Exhibition grounds, trade fairs
- Public areas and squares
- Car parking facilities
- Cityscapes with architectural value
- Car-Wash facilities
- School yards
- Road verge drainage
- Underground car parks, multi-storey car parks
- Access drives private