hauraton

RECYFIX®PRO 100

RECYFIX®PRO 100, class C 250, Type 01 with FIBRETEC design slotted grating in the colour Sand, SW 9 mm, locked

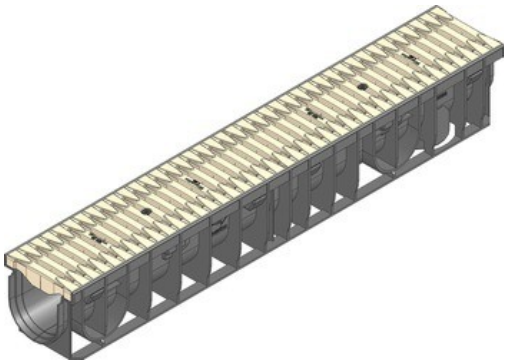

C 250

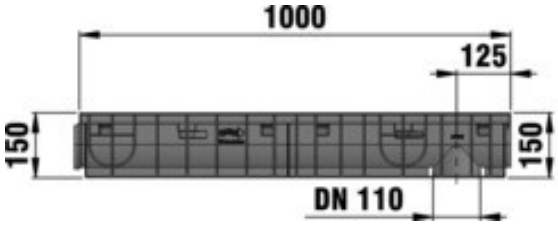



Technical data:

Length mm	Width mm	Height mm	Weight kg	Inlet cross-section cm²/m	Drainage cross-section cm²	Inlaying depth	Item-no.
1000	**160**	**150**	**4,595**	**372**	**92**	**20**	**47405**

Product description:

RECYFIX PRO 100 type 01 - channel made of modified PP, with integrated angle housing, with vertical connection possibility DN/OD 110, with FIBRETEC slotted grating in the colour sand, slot width 9 mm, with horizontal thrust resistance and locking device, loading capacity from A 15 - C 250 according to EN 1433, L/W/H 1000x160x150 mm, item no. 47405

Material:

- **Channel body:** modified Polypropylene
- **Bolts:** Steel black galvanised
- **Locking handle:** RECYFIX Material (recycled PA)
- **Grating:** reinforced Polyamide

Type acc. DIN EN 1433:

M

Set of rules:

DIN 19580/EN 1433

Application areas:

- Railway platform
- Facade drainage
- Flat roofs, terraces and balconies
- Pedestrian zones
- Gardening and landscaping

- Multi storey car parks
- Market squares, markets
- Public areas and squares
- Cityscapes with architectural value
- Cycle paths and footpaths
- School yards
- Access drives private