

- Locked
- Anti-slip Coating (60+ PSRV)
- Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
- It is the responsibility of all users to satisfy themselves the above data is current.
- Installation details are available on request.
  Published September 2016 Version 1.AC











## Highway

## D400 & HA104/09 Group-4 Catch Pits - Four Flanged

Designed and manufactured to exceed the enhanced requirements of Highways England's HA 104/09 specification. The Highway range of access covers and gully grates conforms to BS EN 124 and also includes patented safety provisions and design features to ensure safe and robust performance.








Illustrated: DGHT0D4/1045/ KH4F

Illustrated: DGHT0D4/6045/ KH4F

Illustrated: DGHT0D4/4242/KH4F DGHT0D6/4242/KH4F

WREKIN PRODUCTS STOCK CODE	ITEM DESCRIPTION	CLEAR AREA (C x Dmm)	BASE OPENING (F x Gmm)	OVERALL FRAME (A x B mm)	FRAME DEPTH (E mm)	WATERWAY (cm²)
DGHT0D4/4337/ KH4F	430 x 370 x 100mm	430 x 370	450 x 390	625 x 565	100	990
DGHT0D6/4337/ KH4F	430 x 370 x 150mm	430 x 370	450 x 390	625 x 565	150	990
DGHT0D4/4242/ KH4F	450 x 450 x 100mm Hinged Double Tri, Group 4	425 x 425	450 x 450	615 x 615	100	1200
DGHT0D6/4242/ KH4F	450 x 450 x 150mm Hinged Double Tri, Group 4	425 x 425	450 x 450	615 x 615	150	1200
DGHT0D4/6045/ KH4F*	600 x 450 x 100mm Double Tri Gully, Group 4	580 x 425	600 x 450	775 x 625	100	1740
DGHT0D6/6045/ KH4F*	600 x 450 x 150mm Double Tri Gully, Group 4	580 x 425	600 x 450	775 x 625	150	1740
DGHT0D4/6060/ KH4F	600 x 600 x 100mm Double Tri Catch Pit, Group 4	580 x 580	600 x 600	775 x 775	100	2060
DGHT0D6/6060/ KH4F	600 x 600 x 150mm Double Tri Catch Pit, Group 4	580 x 580	600 x 600	775 x 775	150	2060
DGHT0D4/1045/ KH4F*	1000 x 450 x 100mm Double Tri Gully, Group 4	980 x 425	1000 x 450	1175 x 625	100	2810
DGHT0D6/1045/ KH4F*	1000 x 450 x 150mm Double Tri Gully, Group 4	980 x 425	1000 x 450	1175 x 625	150	2810

## **Dimensions:**

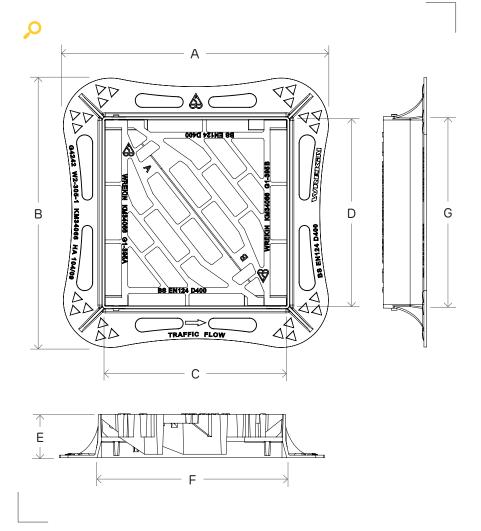



- Fully compliant with BS EN 124
- Complies with Highways England specification HA 104/09
- Third party certified by BSI
- Four flanges for placement away from kerb edges
- A Hinged product for ease of access
- Captive hinges reduce risk of theft and allow easy access for cleaning
- Enlarged frame corners help to dissipate the load
- Non rock Three point suspension for non rock stability
- Waterway area 2060cm<sup>2</sup>
- Manufactured from strong and highly durable ductile iron
- Mechanical lifting points



Diagram Key		
AxB	Overall Frame Size	
CxD	Clear Area	
FxG	Base opening	
Е	Frame Height	