

TriStar™



TriStar

D400 Straight Bar Gully Grate - Group 3

Wrekin has developed its most competitive gully grate to date. The new TriStar gully addresses many issues related to cost-effective products.

The frame has been designed to suit all existing gully pot styles and will sit over a typical 450mm Ø circular or horseshoe chamber.

An additional feature of the frame's design is the anti-debris feature to stop the backfill material entering the chamber (see figures 1 & 2).

WREKIN PRODUCTS' STOCK CODE	CLEAR BASE OPENING (F x G mm)	OVER FRAME SIZE (A x B mm)	FRAME DEPTH (mm)	CLEAR AREA (C x D mm)	WATERWAY AREA
DGH0D4/4337/KT	450 x 400	595 x 475	100	430 x 370	1050
DGH0D6/4337/KT	450 x 400	595 x 475	150	430 x 370	1050

Available options:

- Locked
- Anti-slip Coating (60+ PSRV)

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available on request.
4. Published July 2017 - Version 2.AC



SCAN QR CODE FOR MORE INFO



- For use in a Group 3 D400 class environment
- Third party certified by BSI
- Waterway area - 1050cm²
- Non rock - Three point suspension for non rock stability
- Captive hinges reduce risk of theft and allow easy access for cleaning
- Manufactured from strong and highly durable ductile iron

Dimensions:

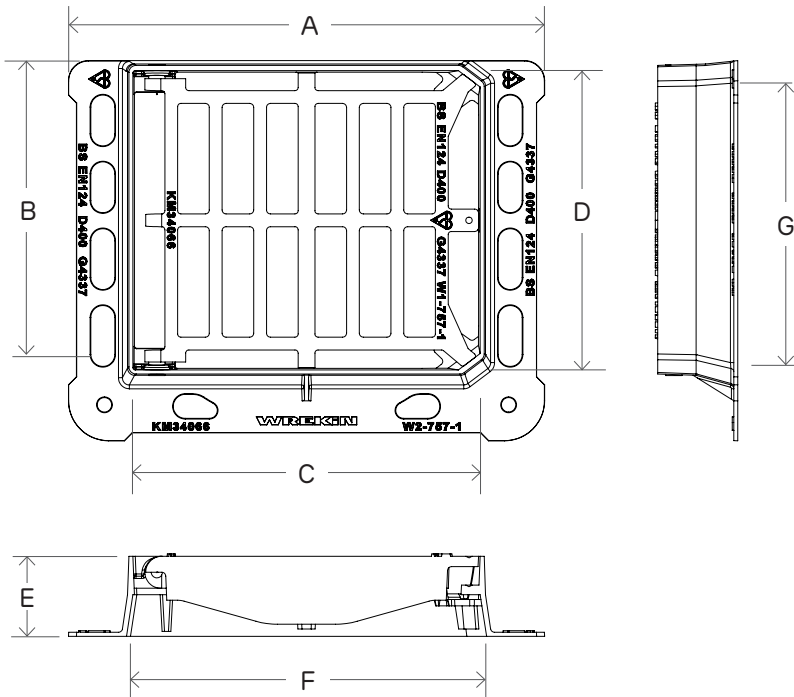


Diagram Key

A x B	Overall Frame Size
C x D	Clear Area
F x G	Base Opening
E	Frame Height

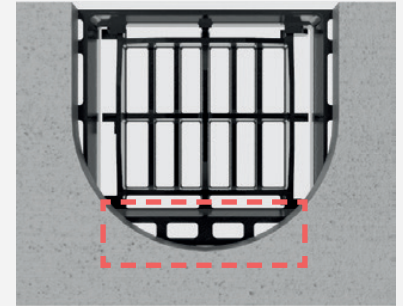


Figure 1: Typical Gully Footprint



Figure 2: TriStar Gully Footprint