
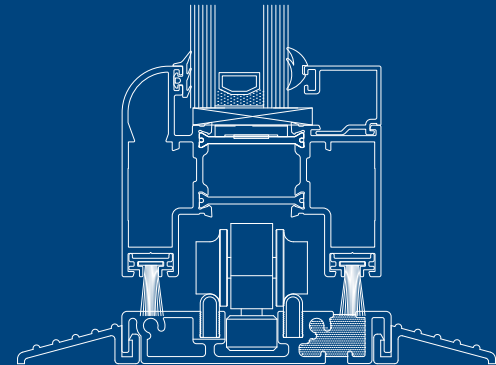


Visofold

The Visofold series of slide-folding doors offer impressive opening apertures that can unite internal and external areas creating unique living and social areas. Suitable for both residential and commercial applications.








Features door systems tested to (depending on system):

- U Values up to $1.5 \text{ W/m}^2\text{K}$
- Security tested to PAS 24: 2012
- Weather tested to BS 6375 Part 1: 2009

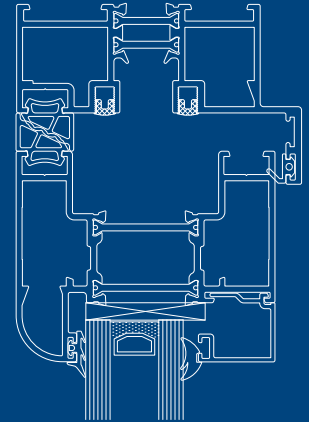

Configurations

Plus many more designs please speak to your supplier for further information

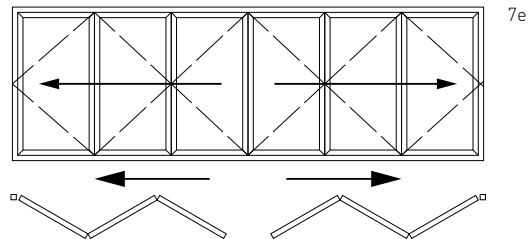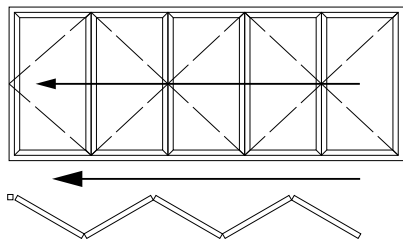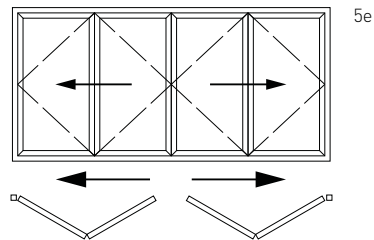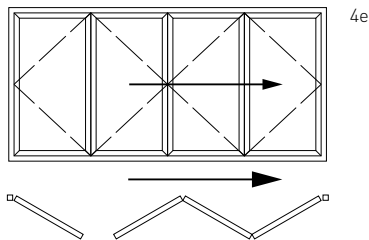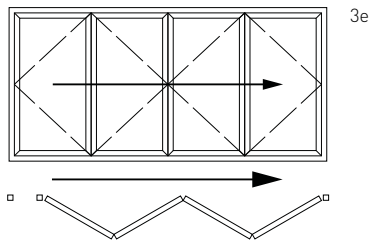

Visofold 1000

Application

- ♦ Residential/retail/commercial

Features

- ♦ Attractive, slim-line profiles offer reduced sightlines
- ♦ Profiles available in either square or rounded edge options
- ♦ Fabricated using mitred corners
- ♦ Lock mechanism available with domestic style 'lift-up' handle and an adjustable, one-piece keep
- ♦ Manufactured using Smarts punch tooling

Technical Performance

Finish Single or dual colour, marine quality polyester powder coat as standard **

U Value 1.5 W/m²K using a 1.0 centre pane

Air Class 4, 600Pa

Water Class E, 750Pa

Wind Class 4, 1800Pa

Document L Compliant

PAS 24:2016 Enhanced Security Performance

Dimensions

Frame Width 102.5mm

Frame Depth 70mm


Glass 28, double glazed units

Max o/a Height: 2500mm (per sash)


Max o/a Width 1200mm (per sash)

Max Sash Weight: 100kg


(For sizes outside of these parameters, contact Smarts Technical).



Head

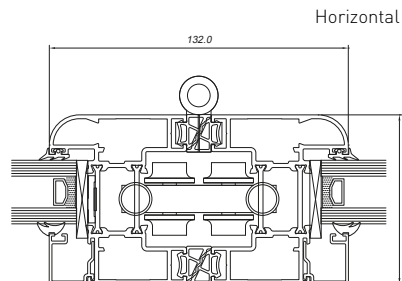

Horizontal

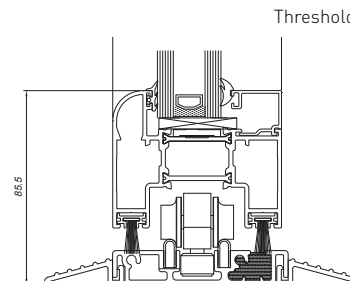

Threshold

