


www.akirby.co.uk

TECHNICAL INFORMATION SHEET

900302 Kensington Oak Parquet Collection

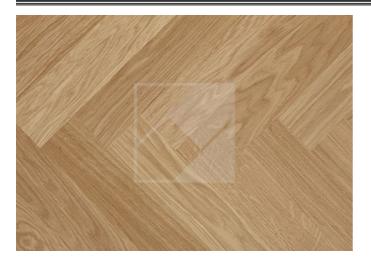

Product Details

Surface	Smooth
Finish	Natural Oil Protect
Grade	Select
Profile	T&G
Edge	Square Edge
Pattern	Block
Width	70mm
Length	500mm
Thickness	11mm
Wear Layer	3.6mm
Backing	Spruce Staves
Top Layer	Oak

Grading Information

Select grade is likely to contain some boards that have a higher number of knots than Prime, and you should also expect some of these knots to be larger in size. There is a possibility of some sapwood and small cracks and filler are likely to be present. A greater level of colour variation in the timber is to be expected.

Product Information

Product Name Product Code Collection Construction Size Pack Size Grade Kensington Oak 900302 Parquet Engineered 11 x 70 x 500mm 1.68 Select

Installation Method

Floated	No
Secret Nailed	No
Stuck Down	Yes
Underfloor Heating	Yes

Technical Information

Formaldehyde Emissions	E1
Pentachlorophenol Emissions	Not Detectable
Hardness Rating	34 - 41
Slip Resistance	R10
Fire Classification	Cfl-s1
Thermal Conductivity	0.078 m²K/W
Moisture Content	7% +/-2%
Domestic Warranty	30 years
LEED Certification	Yes
EPD Certification	Yes
Responsible Certification	Please ask a member of the team

Installation and Warranty

Atkinson & Kirby recommend all floors should be installed by a competent installer. Atkinson & Kirby warranties apply only to floors that have been installed according to our fitting instructions found on our website.

This technical information sheet was compiled and written by Atkinson & Kirby. At the time of publication all information is specified correctly. The company reserves the right to change the specification of this product at any time without prior notice to third parties. To confirm the latest information, please speak to a member of the team



Atkinson & Kirby, Archwood House, Kingsfield Court, Chester, CH4 9RE T: 01695 573234 | E: sales@akirby.co.uk