### 8'x6' Shiplap Single Door Shed

# ROWLINSON® GARDEN PRODUCTS

**Assembly Instructions** 

### Before assembly

- We recommend that time is taken to read the instructions before starting assembly, then follow the easy step by step guide.
   The instruction sheet is only a guide to the assembly. Certain items may not be shown to scale.
- · Check all components prior to assembly
- This product should be assembled by no less than two people
- Drill all components where indicated
- Gloves are recommended when handling components









### Recommended tools for assembly

- Power Drill/Screwdriver
- · Cross-head drill bit
- 3mm diameter drill bit
- 6mm diameter drill bit
- Tape measure
- Hammer
- Sharp knife
- Spirit level
- Step ladder




This instruction shows the building construction with the door to the left-hand side of the front. If preferred the door can be positioned to the right-hand side.



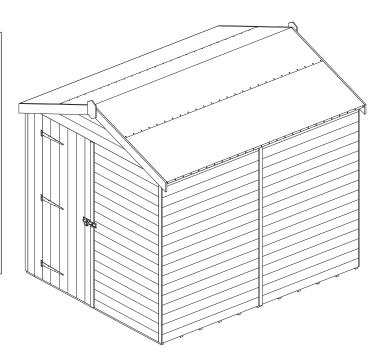

No.	Components	Qty.
- 1	Floor	2
2	Side wall panel (Width 1174mm)	4
3	Back/Front wall panel (Width 860mm)	3
4	Front panel (Width 190mm)	- 1
5	Apex panel	2
6	Roof rafter	2
7	Roof rafter support block	2
8	Roof rafter brace	- 1
9	Roof rafter block (Length 150mm)	4
10	Roof purlin (Length 1174mm)	4
11	Felt batten (Length 1186mm)	4
12	Roof panel	4
13	Roof felt roll (5m)	Ι
14	Roof ridge felt roll (2.5m)	ı
15	Door header rail (28x28x670mm)	Ι
16	Door rebate strip (12x22x1685mm)	ı
17	Door	ı
18	Door weatherstrip (12x48x830mm)	2
19	Coverstrips (12x40x1715mm)	7
20	Bargeboard	4
21	Finial	2


No.	Fixing Kit	Qty.
22	T-Hinge	3
23	Pad bolt	- 1
24	Turn button	
25	50mm coach bolt	4
26	Nut	4
27	Washer	4
28	60mm screws	15
29	50mm screws	48
30	32mm screws	44
31	25mm screws	28
32	20mm screws	6
33	30mm nails	61
34	10mm felt nails	128

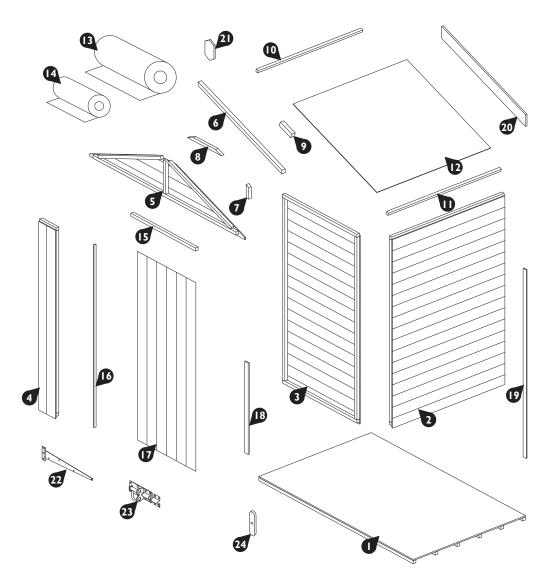




Prepare a firm level area that is slightly larger than the floor, for the shed to sit. To protect the floor and validate the anti-rot guarantee, adequate provision must be made to ensure ground contact is avoided. The building must not be allowed to sit in pooled water during wet conditions and air must be able to circulate underneath the building. Recommended base options include either:


- Concrete pad
- Slabs
- Decking
- 50x50mm pressure treated timber bearers (minimum requirement)

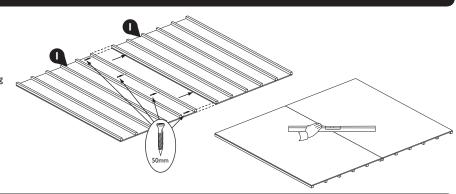



### 2. Wall Panels

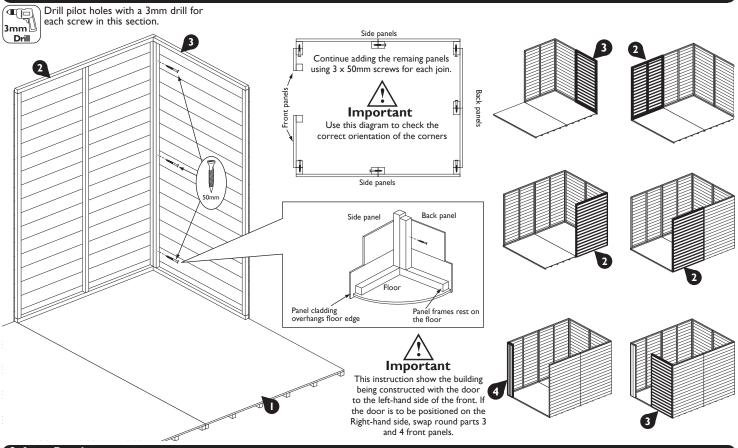




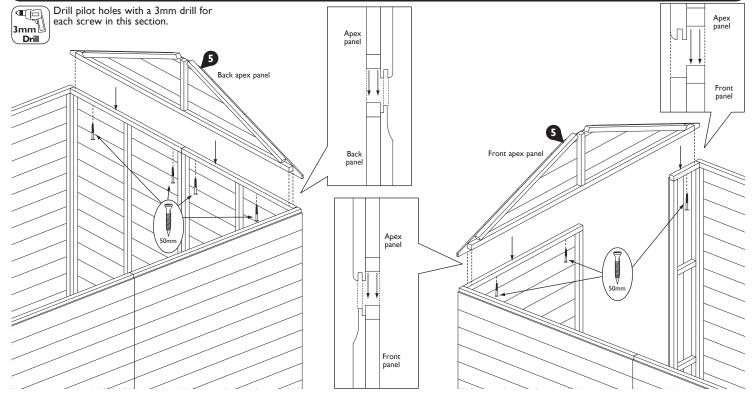

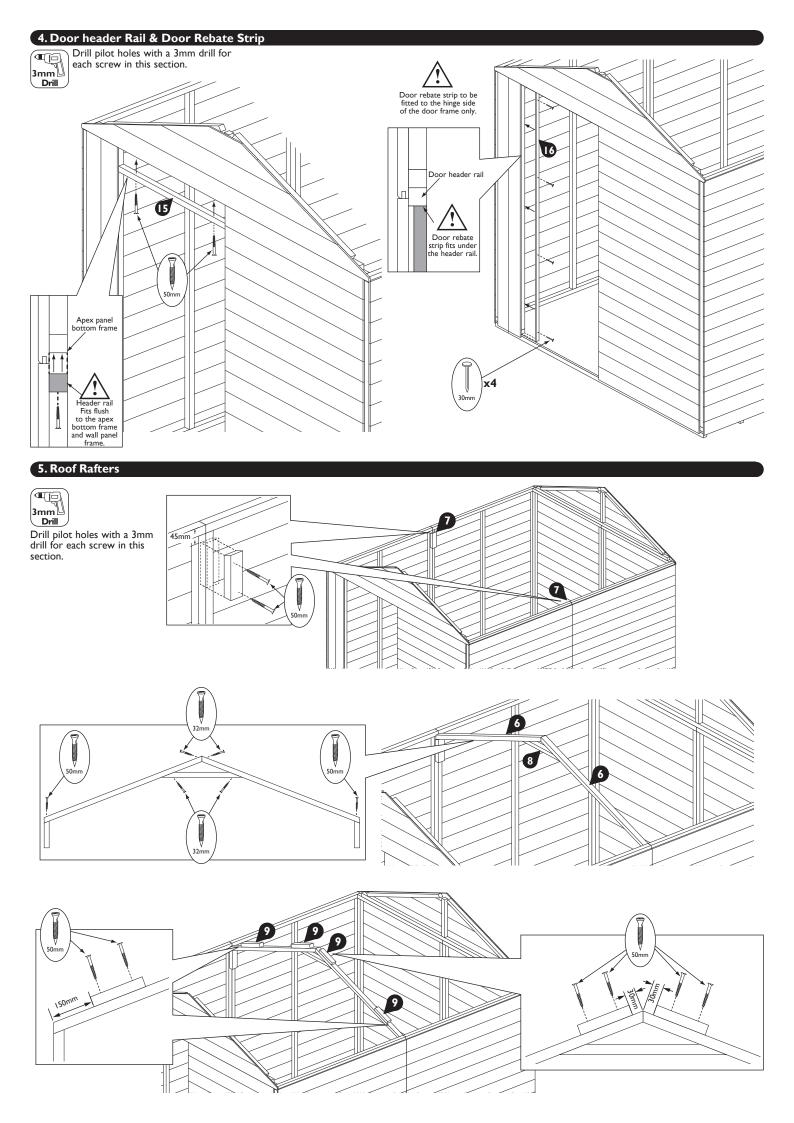

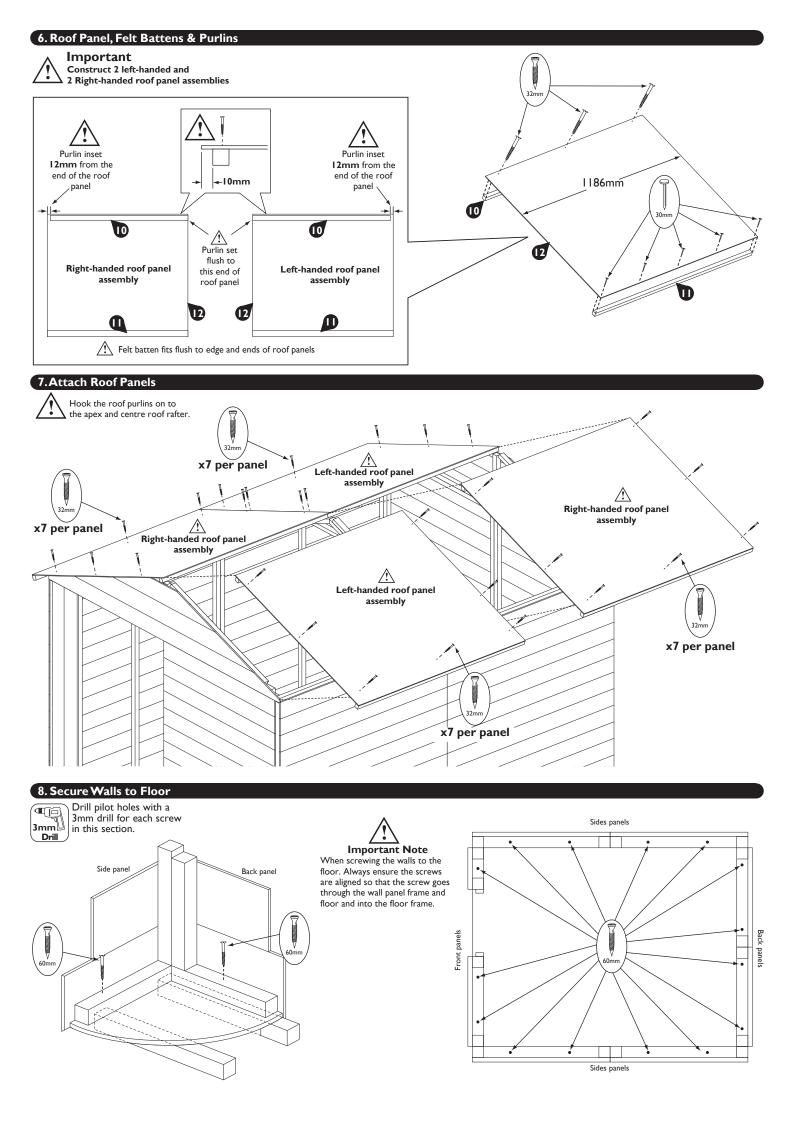

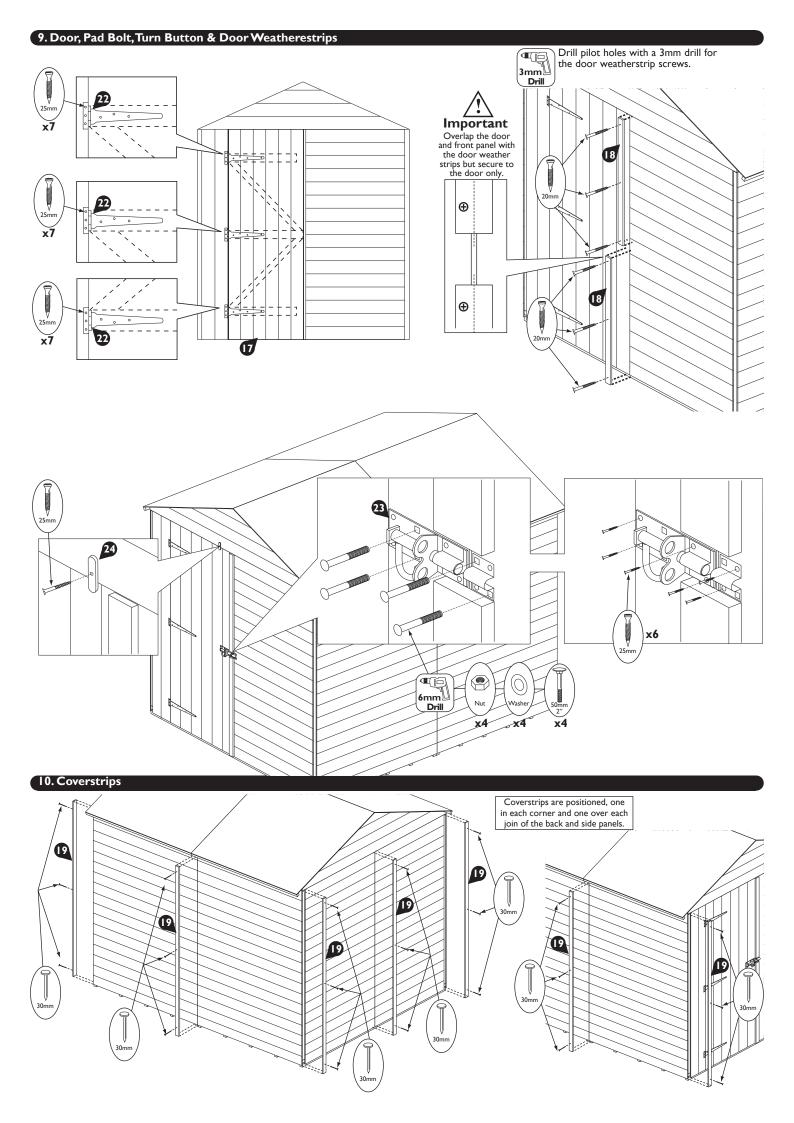

## II. Roof Felt **ROOF FELT ROLL** must be cut into two equal lengths. Fold the felt over the roof edge and nail to the felt batten. Leave felt over hang eave felt over hang at front and rear. at front and rear. 10mn Felt Nails x26 x 26 Leave felt over hang at front and rear. 10mm Felt Nails Fold felt down at the front and **x**26 11111111 rear. Nail to the ends of the felt batten and apex panels 14 2. Bargeboards & Finials 20 If necessary trim off any excess 20 roof felt.

### Important information - Retain For Future Reference

Please dispose of all packaging responsibly and recycle where possible in line with local authority requirements.

Pressure treated Shiplap buildings require no further preservative treatment, However they can be painted or stained if required. To protect the floor and **validate the anti-rot guarantee**, adequate provision must be made to ensure ground contact is avoided. The building must not be allowed to sit in pooled water during wet conditions and air must be able to circulate underneath the building. Recommended base options include either concrete pad, slabs, decking. The minimum requirement is 50x50mm pressure treated timber bearers.

### **Timber Information**

As timber is a natural material, there are certain weather conditions that may affect the materials properties. In times of excessive dry spells the material may lose some of its internal moisture causing a certain degree of shrinkage on a panel and in periods of excessive rain there will be a certain amount of swelling throughout the wooden panels. This process can not be avoided. If you have problems with certain boards shrinking in dry spells try to decrease the amount of direct sunlight on the building or the amount of air passing over the building. During hot spells spray water directly onto the panels with the aid of a garden hose.

If in doubt of any aspect regarding the assembly, use or safety of your building please contact us:

### Help Line: (Normal Office Hours) 01829 261 121

### Email: support@rowgar.co.uk

ROWLINSON GARDEN PRODUCTS LIMITED Green Lane Wardle Nr. Nantwich Cheshire CW5 6BN www.rowgar.co.uk We constantly improve the quality of our products, occasionally the components may differ from the components shown and are only correct at time of printing. We reserve the right to change the specification of our products without prior notice.