


CANTERBURY HANDMADE CLAY PLAIN TILES

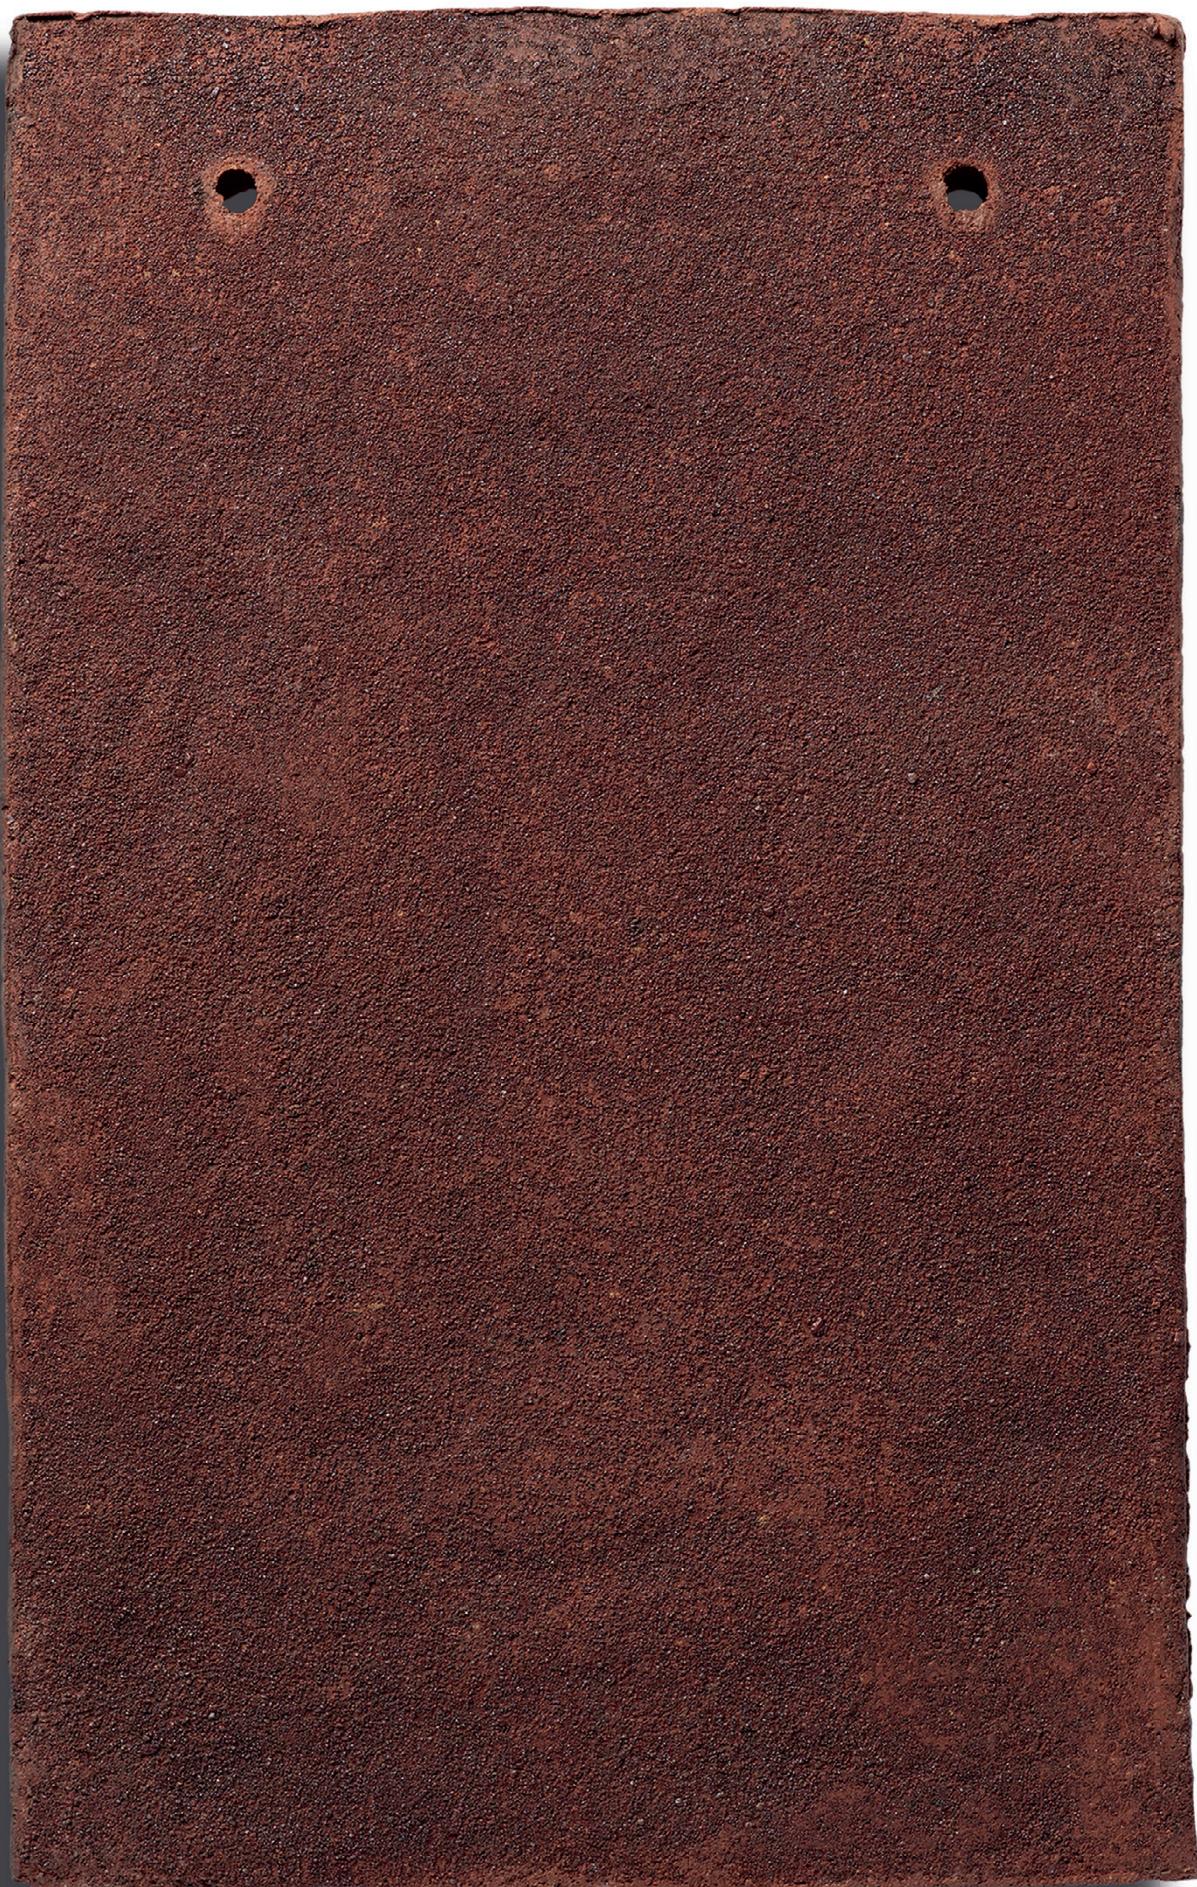

BURFORD

CANTERBURY HANDMADE

The Burford has a fully sanded texture, which is synonymous with the handmaking process and a mellow red-brown tone that will add warmth and character to any roof. All three colours in the Canterbury range are available with their own traditional handmade fittings and accessories to provide a truly traditional finish.



Burford (F)



Key

(F) Fine sanded finish

Technical data		
Size of tile	265mm x 165mm	
Minimum pitch*	40°	
Maximum pitch	90°	
Minimum headlap	65mm (roof)	35mm (vertical)
Maximum gauge	100mm (roof)	115mm (vertical)
Tile thickness	13mm (nominal)	
Cover width	165mm (nominal)	
Covering capacity (net)	60 tiles m ² at 100mm gauge (roof)	
Covering capacity (net)	53 tiles m ² at 115mm gauge (vertical)	
Weight of tiling (approx.)	74kg/m ² (0.73kN/m ²) at 100mm gauge (roof)	66kg/m ² (0.64kN/m ²) at 115mm gauge (vertical)
Battens required (net)	10.0 lin.m/m ² at 100mm gauge (roof)	8.7 lin.m/m ² at 115mm gauge (vertical)
Batten size recommended	38 x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	38 x 2.65	
Authority	BS EN 1304	
Green Guide rating	A ⁺ (Element ref: 812410006)	
BES 6001	Very good – can achieve 3 credits	

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.



Call 01283 722588
Email info@marleyeternit.co.uk
Or visit **ME** www.marleyeternit.co.uk

Marley Eternit Lichfield Road Branston Burton upon Trent DE14 3HD

Canterbury mix